

# Belanko™ S



S I M P L I C I T Y

M E E T S   S T Y L E

# CONTENTS

- 02 Stylish design
- 04 Safe and swift installation
- 06 Strong offerings
- 08 Sensible functions for hotels
- 10 Scalable setup
- 12 Catalogue pages
- 19 Selection charts

S I M P L



S T Y L E

I C I T Y



S A F E T Y



# STYLISH DESIGN

## Timeless classics meet a new favourite

There is always room for the basic white and ivory colours because they blend perfectly with every room design. For something different, **Belanko™ S** also offers the anthracite finish.



Glossy finish for easy cleaning



Thin matt finish edging for a distinctive look



## Subtle enhancements that make a difference

Essentials always work. **Belanko™ S** ticks all the boxes for the essential range with a little extra – premium quality, clean lines, smooth surface and slim profile.



Slim profile for a modern touch



White



Anthracite



Ivory<sup>1</sup>

# SAFE AND SWIFT INSTALLATION



## Flexibility

Oblong shaped holes provide flexibility for easy adjustment when the switch is not set straight

## Safe installation

No access to live metal parts even if the cover plate and plate are not installed



## All-in-one

Switch plate and rocker are supplied as a set to enable quick installation

## Safer for the installer, safer for the user

We share the same goal. To get the job done fast, safely and perfectly. **Belanko™ S** was engineered to meet just that purpose.




## Just one click

Clip up to a 4 gang switch single-handed

# ION

**Robustness**  
Ribs make the switch sturdy



**Easy wiring**  
Save time with ready-to-wire screw terminals

**Perfect protection for a neat result**

The soft protection film keeps the product safe from dust and scratches until the work has been completed. Only the soft protection film will get stained by the ongoing wall paintwork.



STRONG

# OFFERINGS



3 gang switch



4 gang switch



BS socket outlet with  
USB A-Type charger



Switched fused connection unit  
with neon and cord outlet



## Above standard selection for standard homes

There is no place like home. Make it comfortable and optimal for modern lifestyles.



Universal dimmer suitable for all modern loads



Dimmable LEDs



Dimmable compact fluorescent lamps



Halogen with electronic or ferromagnetic transformer



Incandescent and halogen lamps



BS socket outlet with USB A-Type charger and IP55 cover



### Suitable for outdoor use

The splash-proof cover allows a 1 gang Belanko™ S mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.

SENSIBLE

FUNCTIO

FOR HOTELS



Indicator for corridor



Key card switch



Internal control unit



## A comprehensive range of hospitality applications

The best compliment for a hotel is when guests feel at home. Now, be a hospitable host at all times with **Belanko™ S** thanks to its hospitality functions.

Compliant with Guest Room Management Systems for hotel operators to efficiently control and manage facilities

# N S



BS socket outlet with USB A-Type and C-Type charger



Keystone data socket



Shaver socket



SCALABLE

SETUP

Infinite possibilities with  
limitless combinations

There is no need to settle for less.  
**Belanko™ S** works both independently  
and with the Arteor range. The Arteor  
adaptor offers perfect versatility  
for your every need – hospitality,  
residential and commercial projects.




Automatic switch



Skirting light



Light whenever and wherever needed

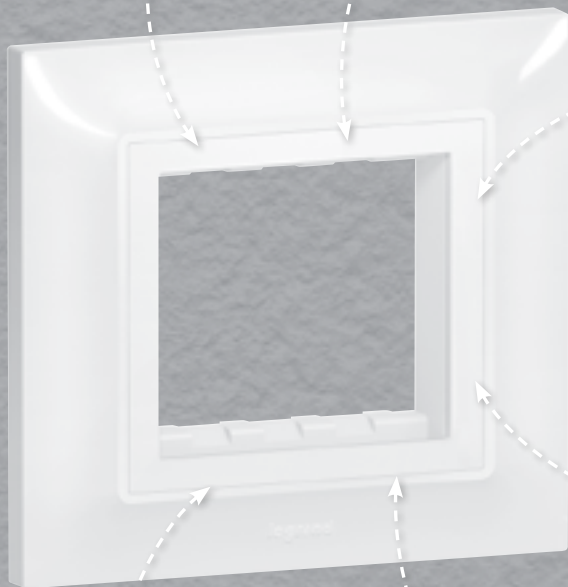

Adaptor for Arteor mechanism



Electronic room thermostat



Temperature controlled every day, every minute



Sensitive switch



No contact needed to switch on and off



Power up quickly and easily



USB C-Type charger



HDMI socket



Quality display ready and available

...and more.



6 176 01



6 176 05



6 176 07



6 176 11



6 176 16

Conform to BS EN 60669-1  
 Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang)  
 Supplied with 2 screws M3.5 for BS boxes

### Pack Cat.Nos Single pole switches 16 AX - 250 V~

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	6 176 00	<b>1 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 00	
10	6 178 00 <sup>1</sup>	
10	6 176 01	<b>1 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 01	
10	6 178 01 <sup>1</sup>	
10	6 176 02	<b>2 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 02	
10	6 178 02 <sup>1</sup>	
10	6 176 03	<b>2 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 03	
10	6 178 03 <sup>1</sup>	
10	6 176 09	<b>Intermediate switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 09	
10	6 178 09 <sup>1</sup>	
10	6 176 04	<b>3 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 04	
10	6 178 04 <sup>1</sup>	
10	6 176 05	<b>3 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 05	
10	6 178 05 <sup>1</sup>	
10	6 176 06	<b>4 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 06	
10	6 178 06 <sup>1</sup>	
10	6 176 07	<b>4 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 07	
10	6 178 07 <sup>1</sup>	

### Pack Cat.Nos Single pole switches 20 AX - 250 V~

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
10	6 176 20	<b>1 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 20	
10	6 178 20 <sup>1</sup>	
10	6 176 21	<b>1 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 21	
10	6 178 21 <sup>1</sup>	
10	6 176 22	<b>2 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 22	
10	6 178 22 <sup>1</sup>	
10	6 176 23	<b>2 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 23	
10	6 178 23 <sup>1</sup>	
10	6 176 24	<b>3 gang - 1-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 24	
10	6 178 24 <sup>1</sup>	
10	6 176 25	<b>3 gang - 2-way switch</b> ○ White ● Anthracite ○ Ivory
10	6 177 25	
10	6 178 25 <sup>1</sup>	

### Pack Cat.Nos Push-buttons 6 A - 250 V~

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	6 176 10	<b>1 gang</b> ○ White ● Anthracite ○ Ivory
10	6 177 10	
10	6 178 10 <sup>1</sup>	
10	6 176 15	<b>2 gang</b> ○ White ● Anthracite ○ Ivory
10	6 177 15	
10	6 178 15 <sup>1</sup>	
10	6 176 11	<b>Bell push</b> ○ White ● Anthracite ○ Ivory
10	6 177 11	
10	6 178 11 <sup>1</sup>	
10	6 176 16	<b>2 gang for shutters</b> ○ White ● Anthracite ○ Ivory
10	6 177 16	
10	6 178 16 <sup>1</sup>	

1: Available on request

# Belanko™ S

## double pole switches and cooker control unit



6 176 72



6 176 76

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)  
 Supplied with 2 screws M3.5 for BS boxes

### Pack Cat.Nos Double pole switches 20 A - 250 V~

Pack	Cat.Nos	Description	Color Options
10	6 176 73	<b>1 gang - 1-way switch</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 177 73		
10	6 178 73 <sup>1</sup>		
10	6 176 71	<b>1 gang - 1-way switch + red neon indicator + 1 earth connection</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 177 71		
10	6 178 71 <sup>1</sup>		
10	6 176 72	<b>1 gang - 1-way switch + red neon indicator + 1 earth connection with "Water Heater" marking</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 177 72		
10	6 178 72 <sup>1</sup>		
<b>OCT. 2021</b>		<b>1 gang - 1-way switch + red neon indicator + 2 earth connections</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 176 88		
10	6 177 88		
<b>OCT. 2021</b>		<b>1 gang - 1-way switch + red neon indicator + 2 earth connections with "Water Heater" marking</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 176 89		
10	6 177 89		

### Pack Cat.Nos Double pole switches 32 A - 250 V~


10	6 176 29	<b>1 gang - 1-way switch + red neon indicator connection with "Water Heater" marking</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 177 29		
10	6 178 29 <sup>1</sup>		

### Pack Cat.Nos Double pole switches 45 A - 250 V~

5	6 176 75	<b>1 gang - 1-way switch</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
5	6 177 75		
5	6 178 75 <sup>1</sup>		
5	6 176 76	<b>1 gang - 1-way switch + red neon indicator</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
5	6 177 76		
5	6 178 76 <sup>1</sup>		
5	6 176 77	<b>2 gang - 1-way vertical switch + red neon indicator</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
5	6 177 77		
5	6 178 77 <sup>1</sup>		

### Cooker control unit - 250 V

Pack	Cat.Nos	Description	Color Options
5	6 176 78	<b>45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon</b>	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
5	6 177 78		
5	6 178 78 <sup>1</sup>		







6 176 35



6 176 33

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang)  
 Supplied with 2 screws M3.5 for BS boxes

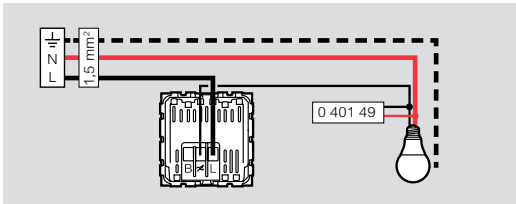Pack	Cat.Nos	Dimmers
1	6 176 31	<b>500 W RL dimmer</b> Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way : - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V ○ White ● Anthracite ○ Ivory
1	6 177 31	
1	6 178 31 <sup>1</sup>	
1	6 176 35	<b>300 W RLC+LED dimmer</b> For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White ● Anthracite ○ Ivory
1	6 177 35	
1	6 178 35 <sup>1</sup>	
1	0 401 49	<b>Active Power Compensator</b>  Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W 
1	6 176 33	<b>Ventilation control</b> Conform to BS EN 60669-1 <b>Fan control 250 V<sup>~</sup> - 50 Hz</b> ○ White ● Anthracite ○ Ivory
1	6 177 33	
1	6 178 33 <sup>1</sup>	

1: Available on request



# Belanko™ S

television, telephone and data sockets



6 176 27



6 176 38



6 176 95



6 176 91



6 176 34

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm  
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 176 27	<b>Single TV socket, female</b> ○ White ● Anthracite ○ Ivory
10	6 177 27	
10	6 178 27 <sup>1</sup>	
10	6 176 26	<b>Single TV socket, "F" type</b> ○ White ● Anthracite ○ Ivory
10	6 177 26	
10	6 178 26 <sup>1</sup>	
10	6 176 38	<b>Double TV socket, female + "F" type</b> ○ White ● Anthracite ○ Ivory
10	6 177 38	
10	6 178 38 <sup>1</sup>	
10	6 176 32	<b>TV-R-SAT</b> ○ White ● Anthracite ○ Ivory
10	6 177 32	
10	6 178 32 <sup>1</sup>	

Pack	Cat.Nos	Data sockets
10	6 176 91	<b>RJ 45 Cat.6 UTP</b> ○ White ● Anthracite ○ Ivory
10	6 177 91	
10	6 178 91 <sup>1</sup>	
10	6 176 92	<b>Double RJ 45 Cat.6 UTP</b> ○ White ● Anthracite ○ Ivory
10	6 177 92	
10	6 178 92 <sup>1</sup>	
10	6 176 17	<b>1 gang - single Keystone adaptor</b> ○ White ● Anthracite ○ Ivory
10	6 177 17	
10	6 178 17 <sup>1</sup>	
10	6 176 34	<b>1 gang - double Keystone adaptor</b> ○ White ● Anthracite ○ Ivory
10	6 177 34	
10	6 178 34 <sup>1</sup>	

1: Available on request

Pack	Cat.Nos	Telephone sockets
10	6 176 99	<b>Telephone connection block</b> 10 connections ○ White ● Anthracite ○ Ivory
10	6 177 99	
10	6 178 99 <sup>1</sup>	
10	6 176 95	<b>BS master</b> ○ White ● Anthracite ○ Ivory
10	6 177 95	
10	6 178 95 <sup>1</sup>	
10	6 176 96	<b>BS secondary</b> ○ White ● Anthracite ○ Ivory
10	6 177 96	
10	6 178 96 <sup>1</sup>	
10	6 176 97	<b>RJ 11 socket</b> ○ White ● Anthracite ○ Ivory
10	6 177 97	
10	6 178 97 <sup>1</sup>	
10	6 176 98	<b>Double RJ 11 socket</b> ○ White ● Anthracite ○ Ivory
10	6 177 98	
10	6 178 98 <sup>1</sup>	



6 176 12

6 176 08

6 176 37 + 5 720 78

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang)  
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 176 12	16 A - 230 V~ - 50/60 Hz Time delay of approx. 30 s after card removal Use card with width max. 54 mm
1	6 177 12	○ White
1	6 178 12 <sup>1</sup>	● Anthracite
		○ Ivory

Pack	Cat.Nos	Hotel bedrooms call indicators
10	6 176 13	2 settings : - Do not disturb - Please clean the room
10	6 177 13	<b>Indicator for corridor</b> Installed in the corridor, displays calls
10	6 178 13 <sup>1</sup>	○ White
		● Anthracite
		○ Ivory


Pack	Cat.Nos	Internal control unit
10	6 176 14	Installed in the room, allows the user to select the desired setting
10	6 177 14	○ White
10	6 178 14 <sup>1</sup>	● Anthracite
		○ Ivory

Pack	Cat.Nos	Shaver sockets
1	6 176 08	Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep. Spacer delivered to fit in standard box, deep 35 mm
1	6 177 08	<b>1 gang</b>
1	6 178 08 <sup>1</sup>	○ White
		● Anthracite
		○ Ivory

Pack	Cat.Nos	Shaver sockets
1	6 176 18	Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep.
1	6 177 18	<b>2 gang</b>
1	6 178 18 <sup>1</sup>	○ White
		● Anthracite
		○ Ivory

Pack	Cat.Nos	Security switch
1	6 176 19	1 A resistive - 250 V~
1	6 177 19	<b>Panic button</b>
1	6 178 19 <sup>1</sup>	○ White
		● Anthracite
		○ Ivory

1: Available on request

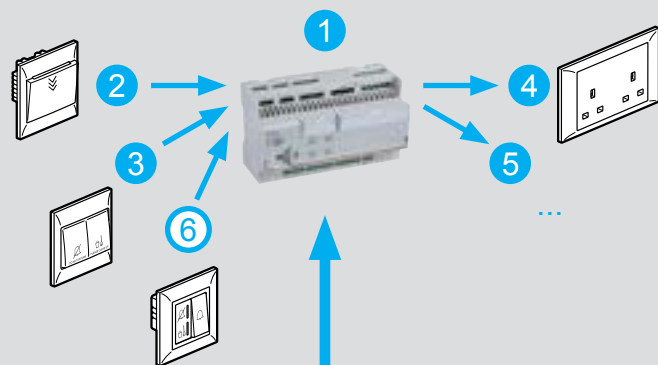**Guest Room Management System**


The Room Controller Unit, Cat.No 048408 or 048412, associated with mechanical Belanko™ S functions can manage the lights, sockets outlet, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.



For complementary information on the Room controller, please contact us



# Belanko™ S

## socket outlets



6 176 41



6 176 49



6 176 58



6 176 44

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~	Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~ with USB charger
10	6 176 41	Conform to BS 1363-2 <b>1 gang single pole switched</b> ○ White ● Anthracite ● Ivory	1	6 176 58	Conform to BS 1363-2:2016 Conform to IEC 60950-1 <b>1 gang single pole switched</b> USB A-Type 2.4 A - 5 V <sub>DC</sub> - 12 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
10	6 177 41		1	6 177 58	
10	6 178 41 <sup>1</sup>		1	6 178 58 <sup>1</sup>	
5	6 176 46	<b>2 gang single pole switched</b> ○ White ● Anthracite ● Ivory	1	6 176 57	<b>1 gang unswitched</b> USB A-Type 2.4 A - 5 V <sub>DC</sub> - 12 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
5	6 177 46		1	6 177 57	
5	6 178 46 <sup>1</sup>		1	6 178 57 <sup>1</sup>	
10	6 176 40	<b>1 gang unswitched</b> ○ White ● Anthracite ● Ivory	1	6 176 57	<b>NEW</b> <b>1 gang single pole switched</b> USB Type C 3 A - 5 V <sub>DC</sub> 15 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
10	6 177 40		1	6 177 57	
10	6 178 40 <sup>1</sup>		1	6 178 57 <sup>1</sup>	
5	6 176 45	<b>2 gang unswitched</b> ○ White ● Anthracite ● Ivory	1	6 176 66	<b>NEW</b> <b>1 gang single pole unswitched</b> USB Type C 3 A - 5 V <sub>DC</sub> 15 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
5	6 177 45		1	6 177 66	
5	6 178 45 <sup>1</sup>		1	6 178 66 <sup>1</sup>	
10	6 176 43	<b>1 gang double pole switched</b> ○ White ● Anthracite ● Ivory	1	6 176 65	<b>NEW</b> <b>2 gang single pole switched</b> USB A-Type + C-Type 3 A - 5 V <sub>DC</sub> 15 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
10	6 177 43		1	6 177 65	
10	6 178 43 <sup>1</sup>		1	6 178 65 <sup>1</sup>	
5	6 176 48	<b>2 gang double pole switched</b> ○ White ● Anthracite ● Ivory	1	6 176 44	○ White ● Anthracite ● Ivory
5	6 177 48		1	6 177 44	
5	6 178 48 <sup>1</sup>		1	6 178 44 <sup>1</sup>	
10	6 176 42	<b>1 gang single pole switched + neon</b> ○ White ● Anthracite ● Ivory	1	6 176 44	○ White ● Anthracite ● Ivory
10	6 177 42		1	6 177 44	
10	6 178 42 <sup>1</sup>		1	6 178 44 <sup>1</sup>	
5	6 176 47	<b>2 gang single pole switched + neon</b> ○ White ● Anthracite ● Ivory	1	6 176 44	○ White ● Anthracite ● Ivory
5	6 177 47		1	6 177 44	
5	6 178 47 <sup>1</sup>		1	6 178 44 <sup>1</sup>	
5	6 176 49	<b>2 gang single pole switched with red cover + neon</b> ● Red	1	6 176 44	○ White ● Anthracite ● Ivory
5	6 177 49		1	6 177 44	
5	6 178 49 <sup>1</sup>		1	6 178 44 <sup>1</sup>	



6 176 41



6 176 49



6 176 58



6 176 44


Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

**British Standard socket outlets 15 A - 250 V~**

Conform to BS 546

**1 gang unswitched**


- 10 6 176 50
- 10 6 177 50
- 10 6 178 50<sup>1</sup>



- White
- Anthracite
- Ivory

**1 gang single pole switched**


- 10 6 176 51
- 10 6 177 51
- 10 6 178 51<sup>1</sup>



- White
- Anthracite
- Ivory

**1 gang single pole switched + neon**

- 10 6 176 52
- 10 6 177 52
- 10 6 178 52<sup>1</sup>



- White
- Anthracite
- Ivory

**2 gang single pole switched**

- 10 6 176 53
- 10 6 177 53
- 10 6 178 53<sup>1</sup>




- White
- Anthracite
- Ivory

**British Standard socket outlets 5 A - 250 V~**

Conform to BS 546

**1 gang single pole switched**

- 10 6 176 54
- 10 6 177 54
- 10 6 178 54<sup>1</sup>



- White
- Anthracite
- Ivory

1: Available on request

# Belanko™ S

## socket outlets (continued)



6 176 64



6 176 55

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)  
 Supplied with 2 screws M3.5 for BS boxes

### Pack Cat.Nos Euro/US socket outlets - 10 A - 250 V $\sim$ / 15 A - 127 V $\sim$

10	6 176 62	 ○ White ● Anthracite ● Ivory
10	6 177 62	
10	6 178 62 <sup>1</sup>	

10	6 176 90	 ○ White ● Anthracite ● Ivory
10	6 177 90	
10	6 178 90 <sup>1</sup>	

10	6 176 64	 ○ White ● Anthracite ● Ivory
10	6 177 64	
10	6 178 64 <sup>1</sup>	

### German Standard socket outlet 16 A - 250 V $\sim$

10	6 176 56	 ○ White ● Anthracite ● Ivory
10	6 177 56	
10	6 178 56 <sup>1</sup>	

### Multistandard switched socket outlet

10	6 176 67	 ○ White ● Anthracite ● Ivory
10	6 177 67	
10	6 178 67 <sup>1</sup>	

4	6 176 69	 ○ White ● Anthracite ● Ivory
4	6 177 69	
4	6 178 69 <sup>1</sup>	

### Multistandard switched socket outlets 16 A 250 V $\sim$ / 15 A - 127 V $\sim$ with USB charger

Shuttered for child safety  
 USB charger conform to IEC 60950-1  
**1 gang - 2P+E**  
 USB A-Type 2.4 A - 5 V $\equiv$  - 12 W  
 Consumption in passive mode < 0.08 W

1	6 176 59	 ○ White ● Anthracite ● Ivory
1	6 177 59	
1	6 178 59 <sup>1</sup>	

**NEW** **1 gang - 2 x 2P+E**  
 USB C-Type 3 A - 5 V $\equiv$  - 15 W  
 Consumption in passive mode < 0.08 W

1	6 176 68	 ○ White ● Anthracite ● Ivory
1	6 177 68	
1	6 178 68 <sup>1</sup>	

### 2 gang - 2 x 2P+E

USB A-Type + C-Type 3 A - 5 V $\equiv$  - 15 W  
 Consumption in passive mode < 0.08 W

1	6 176 55	 ○ White ● Anthracite ● Ivory
1	6 177 55	
1	6 178 55 <sup>1</sup>	

1: Available on request







6 176 82





6 176 85

Material: Thermoplastic with glossy finish  
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)  
 Supplied with 2 screws M3.5 for BS boxes

### Pack Cat.Nos Fused connection units 13 A

Pack	Cat.Nos	
		Conform to BS 1363-4
		<b>Unswitched + cord outlet</b>
10	6 176 80	○ White
10	6 177 80	● Anthracite
10	6 178 80 <sup>1</sup>	● Ivory
		
		<b>Switched + cord outlet</b>
10	6 176 81	○ White
10	6 177 81	● Anthracite
10	6 178 81 <sup>1</sup>	● Ivory
		
		<b>Unswitched + neon + cord outlet</b>
10	6 176 60	○ White
10	6 177 60	● Anthracite
10	6 178 60 <sup>1</sup>	● Ivory
		
		<b>Switched + neon + cord outlet</b>
10	6 176 82	○ White
10	6 177 82	● Anthracite
10	6 178 82 <sup>1</sup>	● Ivory
		

Pack	Cat.Nos	
		<b>Cable outlets</b>
		Conform to BS 5733
		<b>20 A - 250 V~</b>
10	6 176 85	○ White
10	6 177 85	● Anthracite
10	6 178 85 <sup>1</sup>	● Ivory
		
		<b>45 A - 250 V~</b>
10	6 176 86	○ White
10	6 177 86	● Anthracite
10	6 178 86 <sup>1</sup>	● Ivory
		

1: Available on request

# Belanko™ S

## blanking plates and accessories



Pack	Cat.Nos	Blanking plates
		Conform to BS 5733
		<b>1 gang</b>
10	6 176 28	<ul style="list-style-type: none"> <li>○ White</li> <li>● Anthracite</li> <li>○ Ivory</li> </ul>
10	6 177 28	
10	6 178 28 <sup>1</sup>	
		<b>2 gang</b>
5	6 176 39	<ul style="list-style-type: none"> <li>○ White</li> <li>● Anthracite</li> <li>○ Ivory</li> </ul>
5	6 177 39	
5	6 178 39 <sup>1</sup>	

		<b>Arteor adaptor</b>
		Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting lights, USB charger, etc
		<b>1 gang</b>
20	6 176 37	<ul style="list-style-type: none"> <li>○ White</li> <li>● Anthracite</li> <li>○ Ivory</li> </ul>
20	6 177 37	
20	6 178 37 <sup>1</sup>	

1: Available on request

Pack	Cat.Nos	Fixing accessories
		<b>Splash-proof cover</b>
		Mainly for socket protection IP 55 with or without plug engaged
		Space inside : 86 x 86 mm
2	6 176 36	<ul style="list-style-type: none"> <li>● Mist grey</li> </ul>
		<b>Surface-mounting boxes</b>
		Conform to BS 5733
		Depth 35 mm
		<b>1 gang</b>
8	6 133 50	<ul style="list-style-type: none"> <li>○ White</li> </ul>
		<b>2 gang</b>
4	6 133 51	<ul style="list-style-type: none"> <li>○ White</li> </ul>

# Belanko™ S white and colours

## selection chart

		Pack	 White	 Anthracite	 Ivory
<b>SINGLE POLE SWITCHES 16 AX - 250 V~</b>					
1 gang - 1-way switch 1 gang - 2-way switch		10	6 176 00	6 177 00	6 178 00 <sup>1</sup>
		10	6 176 01	6 177 01	6 178 01 <sup>1</sup>
2 gang - 1-way switch 2 gang - 2-way switch		10	6 176 02	6 177 02	6 178 02 <sup>1</sup>
		10	6 176 03	6 177 03	6 178 03 <sup>1</sup>
Intermediate switch		10	6 176 09	6 177 09	6 178 09 <sup>1</sup>
3 gang - 1-way switch 3 gang - 2-way switch		10	6 176 04	6 177 04	6 178 04 <sup>1</sup>
		10	6 176 05	6 177 05	6 178 05 <sup>1</sup>
4 gang - 1-way switch 4 gang - 2-way switch		10	6 176 06	6 177 06	6 178 06 <sup>1</sup>
		10	6 176 07	6 177 07	6 178 07 <sup>1</sup>
<b>SINGLE POLE SWITCHES 20 AX - 250 V~</b>					
1 gang - 1-way switch 1 gang - 2-way switch		10	6 176 20	6 177 20	6 178 20 <sup>1</sup>
		10	6 176 21	6 177 21	6 178 21 <sup>1</sup>
2 gang - 1-way switch 2 gang - 2-way switch		10	6 176 22	6 177 22	6 178 22 <sup>1</sup>
		10	6 176 23	6 177 23	6 178 23 <sup>1</sup>
3 gang - 1-way switch 3 gang - 2-way switch		10	6 176 24	6 177 24	6 178 24 <sup>1</sup>
		10	6 176 25	6 177 25	6 178 25 <sup>1</sup>
<b>PUSH-BUTTONS 6 A - 250 V~</b>					
1 gang		10	6 176 10	6 177 10	6 178 10 <sup>1</sup>
2 gang		10	6 176 15	6 177 15	6 178 15 <sup>1</sup>
Bell push		10	6 176 11	6 177 11	6 178 11 <sup>1</sup>
2 gang for shutters		10	6 176 16	6 177 16	6 178 16 <sup>1</sup>
<b>DOUBLE POLE SWITCHES 20 A - 250 V~</b>					
1 gang - 1-way switch		10	6 176 73	6 177 73	6 178 73 <sup>1</sup>
1 gang - 1-way switch + red neon indicator + 1 earth connection		10	6 176 71	6 177 71	6 178 71 <sup>1</sup>
1 gang - 1-way switch + red neon indicator + 1 earth connection with "Water Heater" marking		10	6 176 72	6 177 72	6 178 72 <sup>1</sup>

1: Available on request



# Belanko™ S white and colours

## selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
<b>DOUBLE POLE SWITCHES 20 A - 250 V<math>\sim</math></b>					
1 gang - 1-way switch + red neon indicator + 2 earth connections		10	6 176 88	6 177 88	6 178 88 <sup>1</sup>
1 gang - 1-way switch + red neon indicator + 2 earth connections with "Water Heater" marking		10	6 176 89	6 177 89	6 178 89 <sup>1</sup>
<b>DOUBLE POLE SWITCHES 32 A - 250 V<math>\sim</math></b>					
1 gang - 1-way switch + red neon indicator		10	6 176 77	6 177 77	6 178 77 <sup>1</sup>
<b>DOUBLE POLE SWITCHES 45 A - 250 V<math>\sim</math></b>					
1 gang - 1-way switch		10	6 176 75	6 177 75	6 178 75 <sup>1</sup>
1 gang - 1-way switch + red neon indicator		10	6 176 76	6 177 76	6 178 76 <sup>1</sup>
2 gang - 1-way vertical switch + red neon indicator		10	6 176 77	6 177 77	6 178 77 <sup>1</sup>
<b>COOKER CONTROL UNIT - 250 V</b>					
45 A DP switch + red neon and 13 A BS switched socket outlet + red neon		5	6 176 78	6 177 78	6 178 78 <sup>1</sup>
<b>DIMMERS</b>					
500 W RL dimmer		1	6 176 31	6 177 31	6 178 31 <sup>1</sup>
300 W RLC+LED dimmer		1	6 176 35	6 177 35	6 178 35 <sup>1</sup>
<b>VENTILATION CONTROL</b>					
Fan control 250 V $\sim$ - 50 Hz		1	6 176 33	6 177 33	6 178 33 <sup>1</sup>
<b>TELEVISION SOCKETS</b>					
Single TV socket, female		10	6 176 27	6 177 27	6 178 27 <sup>1</sup>
Single TV socket, "F" type		10	6 176 26	6 177 26	6 178 26 <sup>1</sup>
Double TV socket, female + "F" type		10	6 176 38	6 177 38	6 178 38 <sup>1</sup>
TV-R-SAT		10	6 176 32	6 177 32	6 178 32 <sup>1</sup>

1: Available on request

# Belanko™ S white and colours

## selection chart

		Pack	 White	 Anthracite	 Ivory
<b>TELEPHONE SOCKETS</b>					
Telephone connection block 10 connections		10	6 176 99	6 177 99	6 178 99 <sup>1</sup>
BS master BS secondary		10 10	6 176 95 6 176 96	6 177 95 6 177 96	6 178 95 <sup>1</sup> 6 178 96 <sup>1</sup>
RJ 11 socket		10	6 176 97	6 177 97	6 178 97 <sup>1</sup>
Double RJ 11 socket		10	6 176 98	6 177 98	6 178 98 <sup>1</sup>
<b>DATA SOCKETS</b>					
RJ 45 Cat.6 UTP		10	6 176 91	6 177 91	6 178 91 <sup>1</sup>
Double RJ 45 Cat.6 UTP		10	6 176 92	6 177 92	6 178 92 <sup>1</sup>
Single Keystone adaptor - 1 gang		10	6 176 17	6 177 17	6 178 17 <sup>1</sup>
Double Keystone adaptor - 2 gang		10	6 176 34	6 177 34	6 178 34 <sup>1</sup>
<b>HOTEL EQUIPMENT</b>					
Key card switch 16 A - 230 V - 50/60 Hz		1	6 176 12	6 177 12	6 178 12 <sup>1</sup>
Hotel bedroom call indicator - Indicator for corridor		10	6 176 13	6 177 13	6 178 13 <sup>1</sup>
Hotel bedroom call indicator - Internal control unit		10	6 176 14	6 177 14	6 178 14 <sup>1</sup>
Shaver socket 115/230 V - 20 VA - 50/60 Hz 1 gang		1	6 176 08	6 177 08	6 178 08 <sup>1</sup>
Shaver socket 115/230 V - 20 VA - 50/60 Hz 2 gang		1	6 176 18	6 177 18	6 178 18 <sup>1</sup>
<b>SECURITY SWITCH</b>					
Panic button 1 A resistive - 250 V~		1	6 176 19	6 177 19	6 178 19 <sup>1</sup>

1: Available on request

# Belanko™ S white and colours














## selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
<b>BRITISH STANDARD SOCKET OUTLETS 13 A - 250 V~</b>					
1 gang single pole switched		10	6 176 41	6 177 41	6 178 41 <sup>1</sup>
2 gang single pole switched		5	6 176 46	6 177 46	6 178 46 <sup>1</sup>
1 gang single pole switched + USB charger A-Type 2.4 A		1	6 176 58	6 177 58	6 178 58 <sup>1</sup>
1 gang single pole switched USB Type-C 3 A 5 V= -15 W		10	6 176 66	6 177 66	6 178 66 <sup>1</sup>
1 gang single pole unswitched USB Type-C 3 A 5 V= -15 W		5	6 176 65	6 177 65	6 178 65 <sup>1</sup>
<b>BRITISH STANDARD SOCKET OUTLETS 13 A - 250 V~</b>					
1 gang unswitched + USB charger A-Type 2.4 A		1	6 176 57	6 177 57	6 178 57 <sup>1</sup>
1 gang double pole switched		10	6 176 43	6 177 43	6 178 43 <sup>1</sup>
2 gang double pole switched		5	6 176 48	6 177 48	6 178 48 <sup>1</sup>
1 gang single pole switched + neon		10	6 176 42	6 177 42	6 178 42 <sup>1</sup>
2 gang single pole switched + neon		5	6 176 47	6 177 47	6 178 47 <sup>1</sup>
2 gang single pole switched + USB charger A-Type + USB charger C-Type 3A – 5V = 15W		1	6 176 44	6 177 44	6 178 44 <sup>1</sup>
2 gang single pole switched with red cover + neon		5	6 176 49	6 176 49	6 176 49 <sup>1</sup>
<b>BRITISH STANDARD SOCKET OUTLETS 15 A - 250 V~</b>					
1 gang unswitched		10	6 176 50	6 177 50	6 178 50 <sup>1</sup>
1 gang single pole switched		10	6 176 51	6 177 51	6 178 51 <sup>1</sup>
1 gang single pole switched + neon		10	6 176 52	6 177 52	6 178 52 <sup>1</sup>
2 gang single pole switched		10	6 176 53	6 177 53	6 178 53 <sup>1</sup>

1: Available on request

## Belanko™ S white and colours






### selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
<b>BRITISH STANDARD SOCKET OUTLETS 5 A - 250 V~</b>					
1 gang single pole switched		10	6 176 54	6 177 54	6 178 54 <sup>1</sup>
<b>EURO/US SOCKET OUTLETS - 10 A - 250 V~ / 15 A - 127 V~</b>					
1 gang - 2 x 2P		10	6 176 62	6 177 62	6 178 62 <sup>1</sup>
1 gang - 2 x 2P switched		10	6 176 90	6 177 90	6 178 90 <sup>1</sup>
1 gang - 2 x 2P+E		10	6 176 64	6 177 64	6 178 64 <sup>1</sup>
<b>GERMAN STANDARD SOCKET OUTLET 16 A - 250 V~</b>					
1 gang - 2P+E with shutters for child protection		10	6 176 56	6 177 56	6 178 56 <sup>1</sup>
<b>MULTISTANDARD SWITCHED SOCKET OUTLET</b>					
1 gang		10	6 176 67	6 177 67	6 178 67 <sup>1</sup>
2 gang		4	6 176 69	6 177 69	6 178 69 <sup>1</sup>
1 gang + USB charger A-Type 2.4 A		1	6 176 59	6 177 59	6 178 59 <sup>1</sup>
1 gang + USB charger USB Type C 3 A - 5 V = -15 W		4	6 176 68	6 177 68	6 178 68 <sup>1</sup>
2 gang USB charger A-Type + C-Type 3 A		4	6 176 55	6 177 55	6 178 55 <sup>1</sup>

1: Available on request

# Belanko™ S white and colours

## selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
<b>FUSED CONNECTION UNITS</b>					
Unswitched + cord outlet		10	6 176 80	6 177 80	6 178 80 <sup>1</sup>
Unswitched + neon + cord outlet		10	6 176 60	6 177 60	6 178 60 <sup>1</sup>
Switched + cord outlet		10	6 176 81	6 177 81	6 178 81 <sup>1</sup>
Switched + neon + cord outlet		10	6 176 82	6 177 82	6 178 82 <sup>1</sup>
<b>CABLE OUTLETS</b>					
20 A - 250 V $\sim$		10	6 176 85	6 177 85	6 178 85 <sup>1</sup>
45 A - 250 V $\sim$		10	6 176 86	6 177 86	6 178 86 <sup>1</sup>
<b>BLANKING PLATES</b>					
1 gang		10	6 176 28	6 177 28	6 178 28 <sup>1</sup>
2 gang		5	6 176 39	6 177 39	6 178 39 <sup>1</sup>
<b>ARTEOR ADAPTOR</b>					
1 gang		20	6 176 37	-	-

1: Available on request



## Notes

---

A series of horizontal dotted lines for writing notes.

## Iraq

Tel: (+962) 799 040 329  
(+962) 655 375 86

## Jordan

Al Madina Al Monawara Street,  
Tlaa' Al Ali, Building no. 263  
Rana Center – 3rd floor  
Offices 301 & 302  
Amman – Jordan

Tel: (+962) 65537586  
Fax: (+962) 65537589

## Kuwait

Shuwaikh Safat 13002  
P.O. Box 177  
KUWAIT

Tel: (+965) 9726 2699  
Fax: (+965) 2482 4754

## Lebanon

Achrafieh 5585 Bldg. 6th floor  
P. Gemayel Avenue – Aadlieh  
Beirut

Tel: (+961) 1 422 166  
Fax: (+961) 1 422 167

## Oman

Tel: (+968) 91397978

## Pakistan

Tel: (+962) 795 066 167  
(+962) 655 375 86

## Qatar

Global Business Center,  
Al Hitmi Village Bldg #8,  
4th Floor, Office #R2  
Corniche Road - Doha, Qatar

Tel: (+974) 4 402 30 18  
Fax: (+974) 4 436 66 73

## Saudi Arabia

**Riyadh** (Central Region Office)  
Al-Sulaiman Square Building,  
2nd Floor, Office 16,  
Mousa Bin Nusair Street  
P.O. Box 325099

Tel: (+966) 11 466 6640  
Fax: (+966) 11 279 01 17

**Al Khobar** (Eastern Region Office)  
Al-Khobar Mall  
2nd Floor, Office 362  
P.O. Box 927  
Al Khobar 31952

Tel: (+966) 3 887 89 50  
Fax: (+966) 3 887 89 52

**Jeddah** (Western Region Office-Head)  
Al-Reem Business Center, 2nd Floor  
Al-Rawdah District  
P.O.Box: 51712  
Jeddah 21553

Tel: (+966) 2 261 9696  
Fax: (+966) 2 261 9797

## United Arab Emirates

Legrand Middle East Headquarters  
Wing C, Office 701  
Dubai Silicon Oasis  
P.O. Box 341068  
Dubai, United Arab Emirates







Tel: (+971) 4 3821 821  
Fax: (+971) 4 3821 822

GemNet Gulf L.L.C.  
(A group company of Legrand)  
Street No. 26, Al Quoz Industrial Area 4,  
P.O. Box 52914,  
Dubai, United Arab Emirates

Tel: (+971) 4 341 9920  
Fax: (+971) 4 341 9940



FOLLOW US  
ALSO ON

-  [legrand.ae](http://legrand.ae)
-  [legrandgulfcountries](#)
-  [legrandgulfcountries](#)
-  [legrandgulfcountries](#)
-  [legrandgulfcountries](#)
-  [legrandgulfcountries](#)



### MIDDLE EAST HEADQUARTERS

Dubai Silicon Oasis  
Wing C, Office 701  
P. O. Box 341068  
Dubai, United Arab Emirates  
Tel. + [971] 4 3821 821  
Fax + [971] 4 3821 822