

# legrand



### CONTENTS

- 4 MORE THAN A UPS
- 6 TECHNOLOGY AND DESIGN
- 8 IDEAL FOR IT INFRASTRUCTURES
- 10 A COLLABORATION OF TECHNOLOGY
- 12 EXCLUSIVE FEATURES
- 14 INTERNAL BATTERIES UP TO 125 KW
- 16 EXCLUSIVE TOUCH SCREEN DISPLAY
- 18 COMPLETE ON BOARD COMMUNICATION
- 20 CATALOGUE
- 22 CUSTOMER CARE SERVICES


# MORE THAN AUPS

Legrand presents the new **Keor MOD**, the latest addition to the UPS family that redefines the concept of modularity.

Design with unrivalled futuristic style and features.

Outstandingly flexible architecture for all installations and applications.

State-of-the-art technology to achieve the highest levels of efficiency.

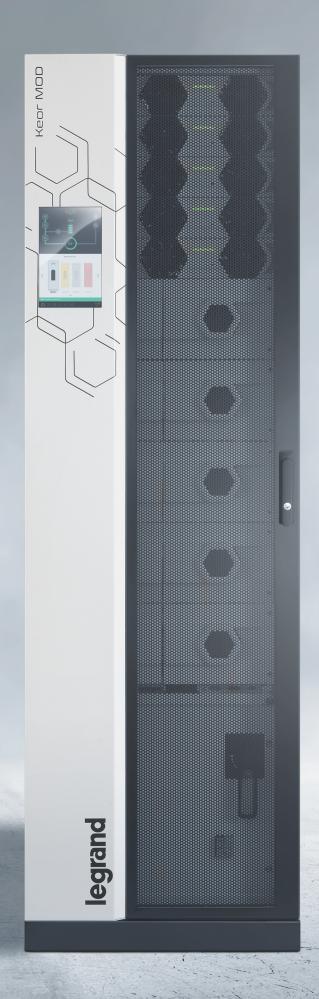



### TECHNOLOGY AND DESIGN

STYLISH

REVOLUTIONARY

The elegance of the design and the skilful choice of materials have joined forces to create a modern and cutting-edge machine, a UPS with a highly emotional DNA boasting market-leading performance.

All the elements comprising the system have been designed to ensure maximum reliability and performance, without forsaking its ease of installation and maintenance. The use of light colours and highly reflective surfaces contribute to reducing environmental lighting in technical rooms (DATA CENTRES), and reduce consumptions in line with a GREEN approach.

**POWERFUL** 

The **Keor MOD** power module is the smallest 25 kW three-phase module available on the market; its high power density (1136 W/dm³) makes it possible to achieve configurations of 125 kW with 5.2 minutes of autonomy (internal batteries) or 250 kW in less than 1m² of space on the ground with the door open.

**PERFORMING** 

Double conversion efficiency up to 96.8%

(from 20% to 50% of the load)

Efficiency in ECO mode up to 99%.

Output power factor = 1

Hot-swappable modules.

Modular redundancy in N+1 configuration.

Intelligence distributed between modules.

UPS system capacity up to 600 kW.

Decentralised by-pass.


Reduced battery charging times.

### IDEAL FOR IT INFRASTRUCTURES

**Keor MOD** is the ideal solution for all critical computer applications such as DATA CENTERS; its structure allows us to respond to customer demands in terms of continuous evolution of the IT infrastructure.

#### The range includes just two cabinet configurations:

- up to 5 power modules with internal batteries (25 125 kW)
- up to 10 power modules (25 250 kW).

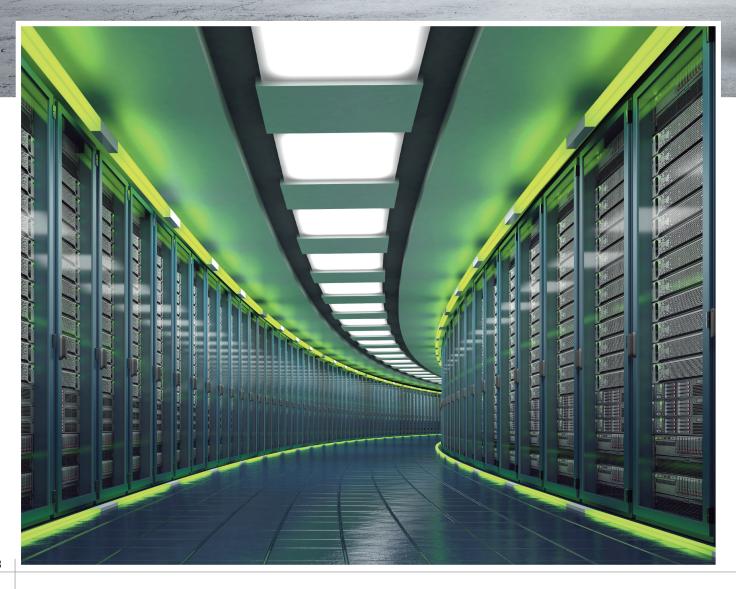





### PARALLEL SYSTEM (Up to 600 kW without batteries)

Each unit can be connected in parallel to identical or different units until the desired power and/or redundancy levels are reached.

For instance, it is possible to connect up to 4 x 125 kW units with internal batteries in parallel, obtaining a total system power of 500 kW (N+1 redundancy equal to 475 kW in any failure situation).



Moreover, with **Keor MOD** it is possible to connect in parallel up to 24 power modules, also connecting cabinets with different numbers of modules.



A COLLABORATION OF



### **TECHNOLOGY**

⊕ WWW, JPS. LEGRAND. COM



#### 25 kW power module in just 2 units

Extensive research and use of latest generation components is behind the development of this three-phase power module with top performance levels in its category, minimising footprints and weights.

With a capacity of 25 kW and a footprint of just 2 rack units, the **Keor MoD** power module ensures maximum performance in exceptionally small spaces.

The **Keor MOD** power module is equipped with "System On Chip" type control technology which, unlike the conventional version (DSP based), contains a dual Core ARM A9 processor, a high performance FPGA and a set of advanced devices within one single component. This technological choice provides an impressive range of advantages.

This technological choice provides an impressive range of advantages in terms of processing power, speed and versatility.

The power module houses the following components: input PFC, three-level inverter, integrated and independent control logic, battery charger, static and electromechanical by-pass.

#### Structured Energy Flow

Unique in its kind, **Keor MOD** introduces the new *Structured Energy Flow* system, effectively eliminating all the connection cables inside the power module.

The connections between the various power sections are achieved by the structure that physically connects them.

This results in an exceptionally high level of reliability.

### **EXCLUSIVE FEATURES**




# MAXIMUM MANOEUVRABILITY

The power module, is extremely compact and integrates two ergonomic handles to facilitate extraction and insertion of the module. Its light weight means it can also be handled by a single person.

# ELECTRICAL AND MECHANICAL SAFETY

A simple and practical "SWITCH" on the front provides the connection and the disconnection both mechanical and electrical, which prevents any incorrect or involuntary removals.

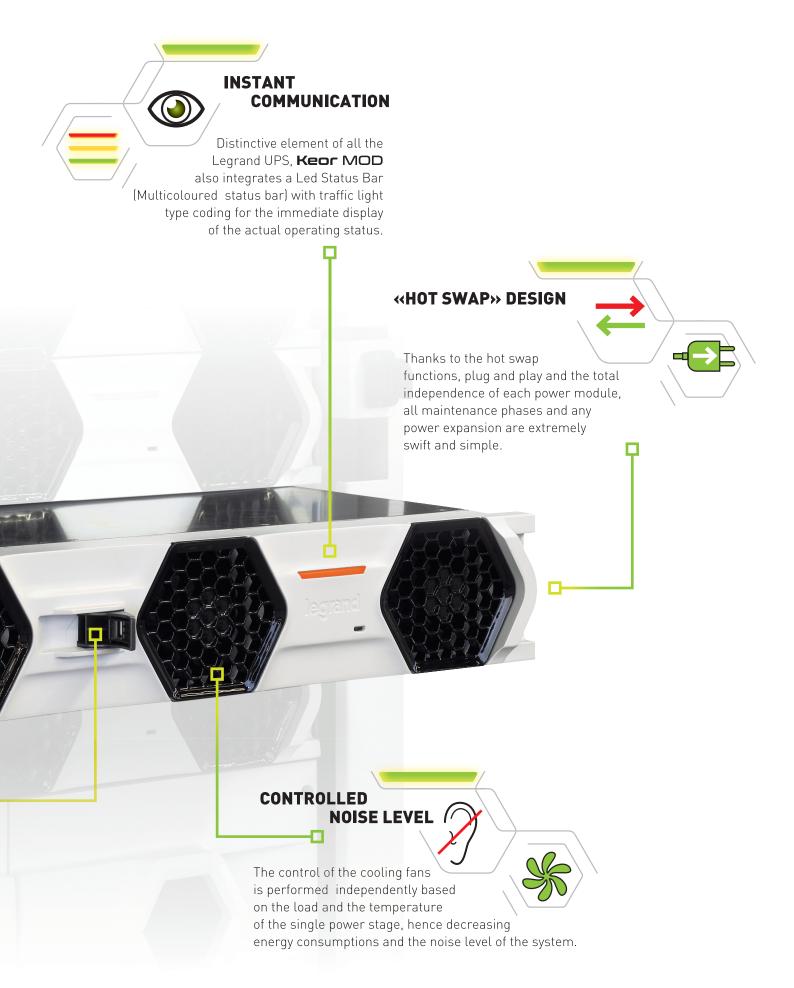





### INTERNAL BATTERIES UP TO 125 KW

#### Safe extraction

The battery drawers can be easily extracted using the handle on the front.

The mechanical anti-extraction stop prevents complete extraction of the drawer, preventing accidental falling and allowing operators to work in complete safety.





#### Light and dividable

The batteries inside the drawer are divided into 4 blocks, each with 6 batteries; this reduces weight (<16 kg each) and avoids direct contacts with dangerous voltages during maintenance phases.

#### Ease of handling

Each 6-battery block can easily be removed using the integrated handle.


The replacement of individual sections requires very little time and guarantees swift maintenance operations.






#### 10 inches with innovative graphics

The display is positioned vertically so you have both the operating block diagram and the UPS layout with all the available information on the same screen.

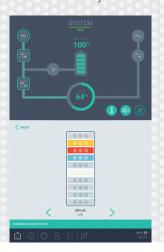

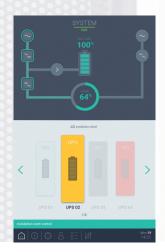





#### Intuitive and user friendly

All the display icons, including the operating panel, are interactive so as to facilitate navigation and the setting of customisable functions.










### COMPLETE ON BOARD COMMUNICATION



## FRONT COMMUNICATION MODULE

The communication module is positioned on the front, is easily accessible and boasts a wide selection of communication interfaces.

- "Cold Start" push-button
- system communication ports
- RS485 port
- RS485 port for external accessories
- logical gate
- communication interface slot
- USB host port
- 11 floating contact inputs
- 8 floating contact outputs





Eliot is the Legrand program dedicated to connected objects (Internet of things) which identifies all those products or systems which, because they can connect to the internet, give added value in terms of functionality, information, interactions with the environment and use.

UPS Modular three-phase double conversion VFI



3 104 80

#### Articles UPS - empty power cabinets

	Power (kW)	Installable battery drawers	Distribution	Weight (kg)
3 104 80 3 104 81		from 2 to 5 battery drawers	3-3 3-3	

#### **Accessories**

Description

3 106 75 25 kW power module

3 106 76 Empty battery blocks kit for 6 batteries (to be used in sets of 4 per drawer)

3 106 77 Kit of 2 EMPTY battery drawers

3 106 78 Kit of 4 battery blocks (6 x 9 Ah batteries)

3 106 79 Kit of 4 battery blocks (6 x 11 Ah batteries)

3 109 62 Kit of 4 battery blocks (6 x 9Ah Long Life batteries)

#### Configuration examples UPS up to 125A

#### 25

Power: 25 kW

Back-up time: 48 min. when 100% charged 1 Power module


10 Battery drawers



#### UPS up to 250A

50

Power: 50 kW 2 Power modules



**75** Power: 75 kW

10 Battery drawers





Power: 100 kW 4 Power modules





#### 125

Power: 125 kW

Autonomy: 5,2 min, when 100% charged 5 Power modules

10 Battery drawers



#### 250

Power: 250 kW 10 Power modules



NOTE: the stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Codes in red new products.



#### UPS Modular three-phase double conversion VFI

eneral specifications										
Nominal power (kVA)	25	50	75	100	125	150	175	200	225	250
Active power (kW)	25	50	75	100	125	150	175	200	225	250
Module power (kW)			'		2	5		,		
Classification	On-Line double conversion VFI-SS-111									
No. Power modules	1	2	3	4	5	6	7	8	9	10
System			M	odular, exp	andable and	d redundan	t UPS syst	em		
out specifications										
Input voltage	400V 3F+N+PE									
Input frequency	45-65 Hz (43.0 ÷ 68.4 Hz)									
Input voltage range	400V +15%/-20% - 230V +15%/-20%									
THD input current	< 3% ( at full load)									
Compatibility with power supply units	Yes									
Input power factor					> 0	.99				
itput Specifications					000 10					
Output voltage	380, 400, 415V									
Efficiency (power module)	Up to 96.8%									
System efficiency		Up to 96.5%								
Efficiency in Eco mode	99% 50/60 Hz selectable by the user ±2 % (standard), ±14 % (extended)									
Nominal output frequency			50/60 HZ S	electable by	-		ard), ±14 %	(extended	3)	
Crest factor					3:					
Waveform					Sinus					
Output voltage tolerance				0.50/:41- 1:	±1		un Bannaula			
THD output voltage				0.5% with li				ad		
Overload capacity		Automo	tio by mann		es at 125%,			nointonono	o bunggo	
Bypass		Automa	lic bypass	(static and	electromeci	ianical) and	ı manuai n	lamenanc	e bypass	
Battery module					Plug 8	 R nlav				
Battery series type/voltage				VRL			1 Ah			
Autonomy	VRLA - AGM 12 V, 9 Ah - 11 Ah  Configurable									
Battery charger			Sr	mart charge			dvanced cv	/cle		
Independent battery configuration	Y	es, maxim							eparate units	 s)
ommunication and management		·		•					·	<del>,</del>
Display				10-incl	n rotating co	olour touch	screen			
Communication ports		2 x		ts (one for					acts,	
	8 output floating contacts, 1 interface slot, USB host port									
Back feed protection	NC/NO auxiliary contact									
Emergency Power Off (EPO)	Yes									
Cold start push-button	Yes									
Remote management					Avail	able				
echanical characteristics										
Height (mm)	1990									
Width (mm)					60	00				
Width (mm) Depth (mm)			I In to F			00		11= t= 40		
Width (mm) Depth (mm) Installable power modules			Up to 5		60	00		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers			Up to 5 Up to 10		60	00		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg					60	00		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions					60 97	70		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg				0 - 40	60	70	ensing	Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg				0 - 40	60 97	70 70 6 non conde	ensing	Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg mbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from				0 - 40	60 97 °C / 0 - 95%	00 70 6 non conde	ensing	Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA)				0 - 40	60 97 °C / 0 - 95% IP	00 70 6 non conde	ensing	Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA)					60 97 °C / 0 - 95% IP 50-	00 70 6 non conde 20		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) onformity Certifications					60 97 °C / 0 - 95% IP	00 70 6 non conde 20		Up to 10		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) onformity Certifications			Up to 10	EN 6204	60 97 °C / 0 - 95% IP 50- 40-1, EN 62	00 70 6 non conde 20 -65	62040-3	_		
Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg nbient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA)			Up to 10		60 97 °C / 0 - 95% IP 50- 40-1, EN 62 ith "plug & 1	00 70 6 non conde 20 65 2040-2, EN	62040-3 modules a	and batterie	98	

### **CUSTOMER CARE SERVICES**



#### **RELIABLE**

We are physically present in over 70 countries, which means we are able to intervene and provide support in over 150 countries worldwide. A team of qualified technicians is at your service to provide support and guarantee the correct functioning of your UPS; this aims to ensure high quality power and availability of energy even at the most critical loads.

#### **EXCELLENCE**

Legrand's competitive advantage lies in its capacity to provide high added value UPS and services for end users and business partners alike. Legrand's vision sees the creation of value as finding low energy consumption solutions, but also integration of solutions in the process of global development. With a catalogue of over 200,000 articles, the Group supplies all the products necessary for the realisation of electrical and digital systems, in particular integrated systems, aimed at finding solutions to meet everyone's needs.

#### TAILOR-MADE

Legrand provides a complete range of specific solutions and services to meet customer requirements:

- Pre-sale technical support during the design phase
- Final factory inspection and testing
- Supervision during installation, final testing and commissioning.
   On-site acceptance tests
- Training for operators
- On-site audits
- Extended warranties
- Annual maintenance contract
- Swift intervention in case of emergency calls





#### **SUPPORT**

#### Site inspection, installation supervision

We conduct a complete inspection of the environment in which the UPS will be installed to ensure its safety and failure free operation. Our technicians provide recommendations for the technical office or the electrical installer, and supervise the installation of the UPS before commissioning.

#### On-site tests, commissioning

Our technicians conduct thorough on-site tests and complete configuration of the UPS before commissioning. They also perform final inspection and testing operations according to your needs. The UPS commissioning operations are performed by our qualified engineers, to guarantee maximum functionality and the elimination of any problems after start-up.



#### TRAINING

We provide on-site training to guarantee safe use and efficient operation of your UPS.

Maintenance courses are also held at our training centre with equipment available for practical sessions.



#### **MAINTENANCE**

#### Preventive maintenance

Electronic equipment and electrical systems, like UPS devices, contain components and parts with a limited service life that must be periodically replaced according to the manufacturer's specifications; these replacement times are influenced by many factors, such as the ambient temperature, the nature of the load etc. To guarantee optimal performance and to protect your critical applications, as far as possible, from potential downtimes, it is essential to perform regular preventive maintenance and replace worn parts whenever necessary.

Our servicing contracts include cleaning, IR thermography, measuring, functional testing, event logs and power quality analysis, battery life checks, hardware and software updates and technical reports. A preventive maintenance plan is one of the most convenient ways to preserve your investment and ensure the continuity of your business operations.

#### Corrective maintenance, emergency intervention

Thanks to the use of state-of-the-art equipment, custom made servicing software and regular training courses, our technicians are able to minimise analysis times and guarantee a short MTTR (Mean Time To Repair). The malfunctioning parts will be replaced, and corrective actions, adjustments and updates will be performed to swiftly return the UPS to its normal operational status.



#### Iraq

Tel: (+962) 795 066 167 (+962) 655 375 86

#### **Jordan**

Al Madina Al Monawara Street, Tlaa' AL Ali, Building no. 263 - Rana Center – 3rd floor – Offices 301 & 302 Amman – Jordan Tel: (+962) 65537586

Fax: (+962) 65537586

#### **Kuwait**

Shuwaikh Safat 13002 P.O. Box 177 KUWAIT Tel: (+965) 9726 2699

Fax: (+965) 2482 4754

#### Lebanon

Achrafieh 5585 Bldg., 6th floor P. Gemayel Avenue – Aadlieh Beirut

Tel: (+961) 1 422 166 Fax: (+961) 1 422 167

#### 0man

Tel: (+968) 91397978

#### **Pakistan**

Tel: (+92) 332 374 9443

#### Saudi Arabia

Riyadh (Central Region Office) Al-Sulaiman Square Building, 2nd Floor Office 16, Mousa Bin Nusair Street

P.O. Box 325099 Tel: (+966) 11 466 6640 Fax: (+966) 11 279 01 17

#### Al Khobar (Eastern Region Office)

Al-Khobar Mall 2nd Floor, Office 362 P.O. Box 927 Al Khobar 31952 Tel: (+966) 3 887 89 50 Fax: (+966) 3 887 89 52

#### Jeddah (Western Region Office-Head Office

Al-Reem Business Center, 2nd Floor Al-Rawdah District P.O.Box: 51712 Jeddah 21553

Tel: (+966) 2 261 9696 Fax: (+966) 2 261 9797

#### **United Arab Emirates**

Legrand Middle East Headquarters Wing C, Office 701 Dubai Silicon Oasis P.O. Box 341068 Dubai, United Arab Emirates Tel: (+971) 4 3821 821

Fax: (+971) 4 3821 822

GemNet Gulf L.L.C.
(A group company of Legrand)
Street No. 26,
Al Quoz Industrial Area 4,
P.O. Box 52914,
Dubai, United Arab Emirates
Tel: (+971) 4 341 9920
Fax: (+971) 4 341 9940

#### FOLLOW US ON

- www.legrand.ae
- www.youtube.com/legrandgulfcountries
- www.facebook.com/legrandgulfcountries
- www.twitter.com/legrandgul
- www.instagram.com/legrandgulfcountries
- in www.linkedin.com/company/legrand

#### **La legrand**

#### MIDDLE EAST HEADQUARTERS

Dubai Silicon Oasis Wing C - Office 701 P.O. Box: 341068 Dubai – U.A.E.

Tel: (+971) 4 3821 821 Fax: (+971) 4 3821 822