

Alhambra

ARABIC DESIGN, BRITISH ENGINEERING



tenby[®]



Inspiration

The Alhambra Palace in Granada, Spain was the centre of Islamic culture in Europe for over three centuries. The Palace provided luxurious accommodation and offices for the Royal Court and contains some of the world's finest examples of Arabic art.




Expertise

Inspired by these original decorations, Tenby have produced a range of wiring accessories that give a unique style to any environment.

Added to the classic design is the very latest in engineering. Made in England by Tenby and backed by Legrand, the world's leading manufacturer of wiring accessories, only the finest materials are used, including silver switch contacts, to ensure a long and reliable life.

The range fully complies with the relevant British standards and is subject to the most stringent quality control.



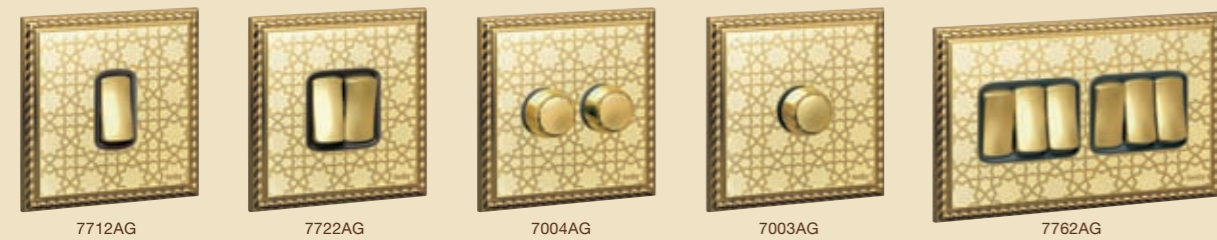

ALHAMBRA SPECIFICATIONS

- Electroplated diecast plates with electrophoretically applied decorative finish and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



| Pack Qty. | Reference No. | Plate Switches 10 AX - 250 V~ | |
|-----------|---------------|--|-----------------------|
| | | Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 92 x 92 mm 4 and 6 gang - 92 x 152 mm | |
| 1 | 7712AG | | 1 gang - 2 way |
| 1 | 7713AG | | 1 gang - intermediate |
| 1 | 7722AG | | 2 gang - 2 way |
| 1 | 7732AG | | 3 gang - 2 way |
| 1 | 7742AG | | 4 gang - 2 way |
| 1 | 7762AG | | 6 gang - 2 way |

| Pack Qty. | Reference No. | Dimmer Units - 230 V~50 Hz | |
|-----------|---------------|--|---|
| | | Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Dimmers for use with tungsten filament lamps, mains voltage GU10 halogen lamps and low voltage systems using appropriate transformers Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7003AG | | 1 gang - 2 way 40 W/VA - 250 W push on/off rotary |
| 1 | 7004AG | | 2 gang - 2 way 40 W/VA - 250 W push on/off rotary |

| Pack Qty. | Reference No. | Double Pole Socket Outlets 13 A - 250 V~ | |
|-----------|---------------|--|-------------------------------------|
| | | Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm | |
| 1 | 7018AG | | 1 gang - switched |
| 1 | 7019AG | | 1 gang - switched + power indicator |
| 1 | 7028AG | | 2 gang - switched |
| 1 | 7029AG | | 2 gang - switched + power indicator |

| Pack Qty. | Reference No. | International Socket Outlets - Max 250V~ | |
|-----------|---------------|--|---|
| | | Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7012AG | | 1 gang - 10/16 A Euro-US 10 AX 1 way |
| 1 | 7016AG | | 1 gang - 10/16 A Euro-US |
| 1 | 7026AG | | 2 gang - 10/16 A Euro-US |

| Pack Qty. | Reference No. | Fused Connection Unit 13 A - 250 V~ | |
|-----------|---------------|--|---|
| | | Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7039AG | | DP switched + cord outlet + power indicator |

| Pack Qty. | Reference No. | Double Pole Switches 20 A - 250 V ~ | |
|-----------|---------------|--|--|
| | | Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7048AG | | 20 A DP |
| 1 | 7049AG | | 20 A DP + power indicator |
| 1 | 7049AGAC | | 20 A DP + power indicator marked 'AIR CONDITIONER' |
| 1 | 7049AGWH | | 20 A DP + power indicator marked 'WATER HEATER' |
| 1 | 7084AG | | 20 A DP + cord outlet |
| 1 | 7094AG | | 20 A DP + cord outlet + power indicator |

| Pack Qty. | Reference No. | Double Pole Switches 45 A - 250 V ~ | |
|-----------|---------------|---|--|
| | | Conform to BS EN 60669-1: 2000 Red rocker Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 152 x 92 mm | |
| 1 | 777AG | | 45 A DP + power indicator |
| 1 | 7767AG | | 45 A DP + power indicator |
| 1 | 7767AGAC | | 45 A DP + power indicator marked 'AIR CONDITIONER' |
| 1 | 7767AGWH | | 45 A DP + power indicator marked 'WATER HEATER' |

| Pack Qty. | Reference No. | TV, Radio and Satellite Sockets | |
|-----------|---------------|--|------------------------------|
| | | Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7771AG | | Screened TV - single |
| 1 | 7751AG | | Screened satellite - single |
| 1 | 7772/2AG | | Screened TV + FM |
| 1 | 7754AG | | Screened TV + FM + satellite |

| Pack Qty. | Reference No. | Single Pole Press Switch 10 A - 250 V~ | |
|-----------|---------------|---|----------------------------|
| | | Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7714AG | | 1 gang - 1 way push switch |

| Pack Qty. | Reference No. | Dimmer Units - 230 V~60 Hz | |
|-----------|---------------|--|---|
| | | Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Dimmers for use with tungsten filament lamps, mains voltage GU10 halogen lamps and low voltage systems using appropriate transformers Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7103AG | | 1 gang - 2 way 40 W/VA - 250 W push on/off rotary |
| 1 | 7104AG | | 2 gang - 2 way 40 W/VA - 250 W push on/off rotary |

| Pack Qty. | Reference No. | Socket Outlet 2 A - 250 V~ | |
|-----------|---------------|--|---------------------|
| | | Conforms to BS 546: 1950 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7050AG | | 1 gang - unswitched |

| Pack Qty. | Reference No. | Socket Outlets - 15 A - 127 V ~ SASO | |
|-----------|---------------|---|--------------------|
| | | Conform to SSA 443/444 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm | |
| 1 | 8001AG | | 1 gang - 15 A SASO |
| 1 | 8002AG | | 2 gang - 15 A SASO |

| Pack Qty. | Reference No. | Double Pole Switches 45 A - 250 V ~ | |
|-----------|---------------|--|--|
| | | Conforms to BS 4177: 1992 Red rocker 45 A - 250 V DP switch with 13 A - 250 V DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 152 mm | |
| 1 | 7775AG | | DP with DP switched socket + power indicator |

| Pack Qty. | Reference No. | Cable Outlet 20 A - 250 V ~ | |
|-----------|---------------|---|---------------------|
| | | Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7330AG | | 20 A terminal block |

| Pack Qty. | Reference No. | Telephone Sockets | |
|-----------|---------------|--|---------------------|
| | | Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7800AG | | Single master UK |
| 1 | 7801AG | | Single secondary UK |
| 1 | 7851AG | | RJ11/12 single |
| 1 | 7861AG | | RJ11/12 double |

| Pack Qty. | Reference No. | Data Sockets | |
|-----------|---------------|---|-------------|
| | | CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm | |
| 1 | 7850AG | | RJ45 single |
| 1 | 7860AG | | RJ45 double |

ب- الخبرات

وقد أنتجت "تنبي" مجموعة من اكسسوارات الأسلاك الكهربائية مستوحاة من الديكور الأصلي لقصر الحمراء مما يضيف إليها طابعاً مميزاً وفريداً يتناسب مع أي مكان.

وقد روعيت أعلى مستويات الهندسة وأحدثها بالإضافة الى التصميم الكلاسيكي . صُنعت في إنجلترا وعُبات في مصانع "لو جراند" الرائدة حول العالم في مجال اكسسوارات الأسلاك. كما روعي استخدام أرقى الخامات والتي اشتملت على مفاتيح التشغيل الفضية اللون لضمان عمر أطول واستخدام أكثر أماناً وسلامة.

وقد طوعت مجموعة اكسسوارات الأسلاك للتوافق مع أعلى و أدق معايير الرقابة النوعية البريطانية الصارمة.



أ- الإلهام

اعتبر قصر الحمراء في مدينة

غرناطة بإسبانيا (الأندلس)

مركزاً للحضارة الإسلامية في

أوروبا لأكثر من ثلاثة قرون.

وقد احتوى القصر على العديد

من الأماكن الفاخرة سواء

للاقامة أو للعمل مما يخدم

جميع أغراض البلاط الملكي.

كما احتوى على بعض من

أشهر وأرفع فنون العمارة

العربية.



الاحمر

التصميم العربي والهندسة البريطانية

tenby®

