


Wiring Accessories



EXPECT THE BEST, YOU DESERVE IT

Summary

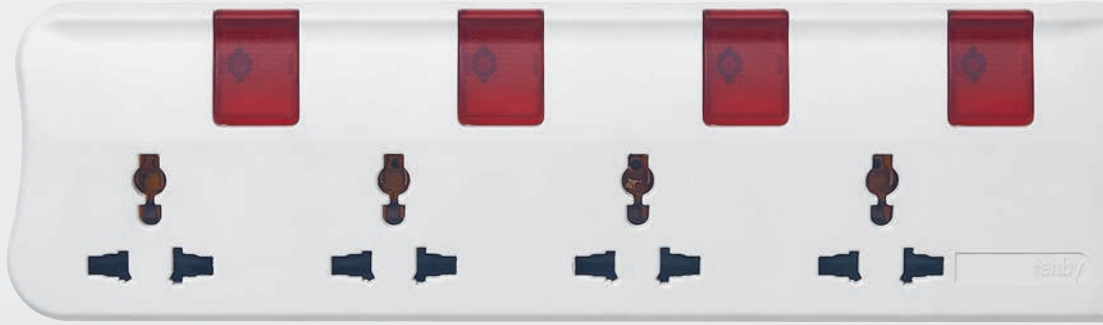


→ TENBY A LIFETIME
OF EVOLUTION
AND INNOVATION

PAGE 2 - 3



→ TENBY THE INSTALLER'S
DREAM, THE USER'S
DELIGHT

PAGE 4 - 5

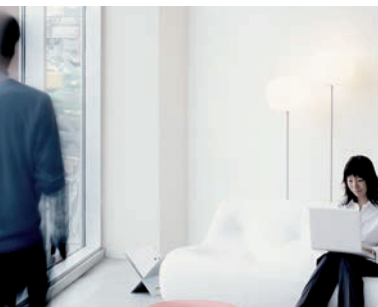

→ DURABLE SOLUTIONS FOR EVERYDAY LIFE

PAGE 6 - 11



→ CONTEMPORARY STYLE

PAGE 12 - 25



→ CLASSIC ELEGANCE

PAGE 26 - 35




→ ARABIC DESIGN, BRITISH EXPERTISE

PAGE 36 - 41



NEW ACCESSORIES, METAL CLAD

PAGE 42 - 43

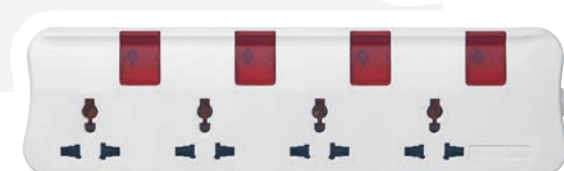



Tenby

a lifetime of evolution and innovation

A team of experts at your service



A FAMOUS NAME

More than **70 years ago**, a modest electrical supplies company was established in Tenby Street, Birmingham.
 Today, Tenby products still carry the famous name from all those years ago... a name which is today recognised as one of the **UK's leading brands** for wiring accessories.


/// Evolution

In a professional market like electrical accessories, success is no accident. It is the result of anticipating and satisfying market requirements, of spearheading technical innovation... something which, over the years, has earned Tenby products the respect that they now carry.

Tenby products are certified by the most stringent classification societies:

CERTIFICATIONS

1. Certified according to IEC 947 standard
2. Manufacturing with respect to the environment ISO 14001-2004
3. ASTA Diamond Mark
4. Gulf Type Certification Certificate (G-Mark)

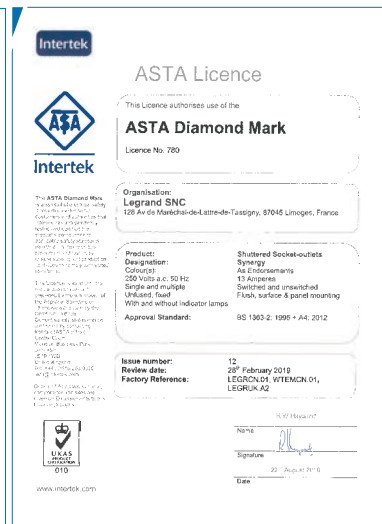


/// A lifetime of innovation

Tenby has a string of firsts to its name. It was the inventor of the first plaster depth switch back in the 1930s, the earthing clamp (around which the British Standard was defined), and one of the first automatically isolated safety lampholders.

Such innovation is proof of continued dedication to customer satisfaction and striving to offer the best possible solutions... something which can now be demonstrated perfectly with the introduction of a completely new range.

Design and manufacturing quality play a vital role in the development of Tenby products. The latest CAD technology is used at design and prototype stages, whilst precision engineering and high quality components guarantee that the end result looks great and works perfectly.

Tenby... expect the best. You deserve it.


**NEW**



Tenby

the installer's dream, the user's delight

Packed with features
to make life easier

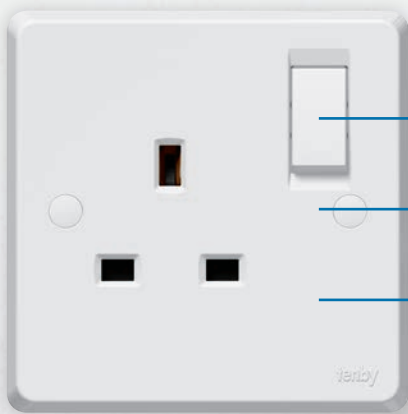


- Semi-recessed rockers
- Supplied with screw caps
- Durable, smooth thermoset finish

EASY
INSTALLATION
AND
MAINTENANCE





- New distinctive LED indicators
- Precision rockers
- Slim profile
- High quality durable metal faceplates

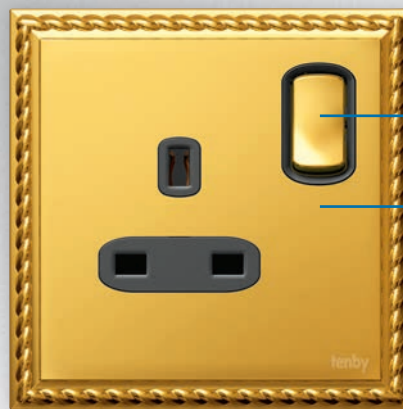

- Matching rockers
- Hidden screws
- Slim profile

/// Unique features


Designed with the contractor and end user in mind, the Tenby ranges offer some unique features that make installation and maintenance easier than ever before.

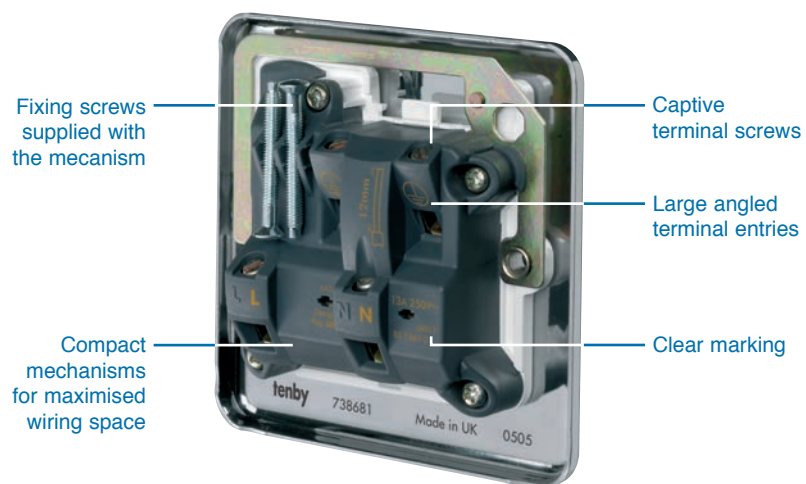




Durable solutions

Tenby quality and more choice than ever before

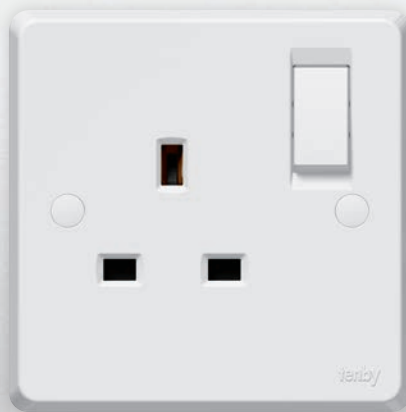

TENBY WHITE,
SOLUTIONS FOR
EVERYDAY LIFE

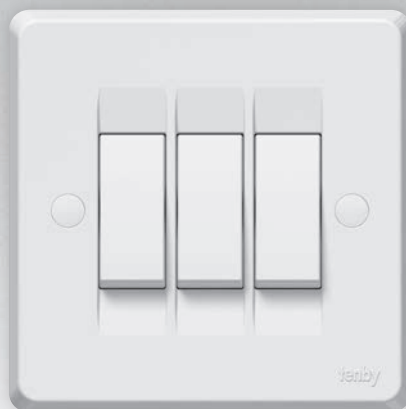

/// White accessories

Fully tested to British and International standards, Tenby's range of white thermoset accessories includes an expanded selection of international standard sockets, providing more choice than ever before.

Retaining Tenby's traditional theme of recessed rockers, this enhanced selection of products uses high quality components, a scratch resistant body and precision manufacturing techniques to ensure long, trouble-free life.

/// New functions

Tenby provides additional functions to suggest just a few more possibilities to meet your everyday lifestyle needs: rotary fan control, BT master + RJ45 cat.6 UTP data socket, dual USB charging socket, fused connection units, ceiling roses, multi-outlet extensions, etc...



Rotary fan control



BT master telephone + RJ45 data socket



Dual USB charging socket



White

Durable solutions for everyday life

SPECIFICATIONS

- Robust thermoset construction
- Optional face plate screw concealment
- Uniform face plate thickness
- Conform to applicable International Standards
- Long-life silver contacts



7380 11



7380 31



7380 62



















7380 10



7380 03



7381 04

Pack Qty.	System Ref.	Plate switches 10 AX - 250 V \sim	Pack Qty.	System Ref.	Rotary dimmer - 100/240 V \sim 50/60 Hz
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 86 x 86 mm 4 and 6 gang - 86 x 146 mm			Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm
10	7380 11	 1 gang - 1 way	1	7380 06	 1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps
10	7380 12	 1 gang - 2 way			60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V
10	7380 13	 1 gang - intermediate			
10	7380 21	 2 gang - 1 way			
10	7380 22	 2 gang - 2 way			
10	7380 31	 3 gang - 1 way			
10	7380 32	 3 gang - 2 way	1	7380 05	 1 gang - 2 way 60 W - 400 W - 50 Hz
5	7380 42	 4 gang - 2 way			Dimmers for use with tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer
5	7380 62	 6 gang - 2 way	1	7380 03	 1 gang - 2 way 40 W - 250 W - 50 Hz
		Single pole press switches 10 A - 250 V\sim Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 86 x 86 mm	1	7380 04	 2 gang - 2 way 40 W - 250 W - 50 Hz
5	7380 14	 1 gang - 1 way push switch	NEW	7381 10	 Conform to BS EN 60669-1 Fan control 250 VA, 230 V \sim - 50 Hz
5	7380 10	 1 gang - 1 way push switch with bell symbol			



7380 18



7380 28



7380 64



7381 41



7381 43



7381 44

Pack Qty.	System Ref.	Single pole socket outlets 13 A - 250 V~	Pack Qty.	System Ref.	Socket outlet 15 A - 250 V~
		Conform to BS 1363 - Part 2: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm			Conforms to BS 546: 1950 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
10	7380 18	1 gang - switched	10	7380 55	single pole 1 gang - switched
5	7380 28	2 gang - switched			Euro/US socket outlets - Max 250 V~ Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
10	7380 19	1 gang - switched + power indicator	5	7380 63	1 gang - 10/16 A Euro-US + 10 AX 1 way switch
5	7380 29	2 gang - switched + power indicator	5	7380 16	1 gang - 10/16 A Euro-US
1	7381 41	1 gang - switched + type A USB charger 2400mA	5	7380 64	2 gang - 10/16 A Euro-US
1	7381 43	2 gang - switched + type A & C USB charger 3000mA	5	7380 65	1 gang - combined BS 13 A/Euro-US
		Double Pole socket outlets 13A			Multistandard socket outlets
1	7381 81	1 gang - switched	7380 20	1 gang switched	
1	7381 82	2 gang - switched	NEW 7381 42	1 gang - switched + type A USB charger 2400mA	
		Socket outlet 2 A - 250 V~ Conforms to BS 546: 1950 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm	NEW 7381 44	2 gang - switched + type A & C USB charger 3000mA	
10	7380 50	1 gang - unswitched - 2 A			Dual USB charging socket For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V Comply with IEC 62684 5 V (output) - 2400 mA Wiring with 1.5 mm ² and 2.5 mm ² (only live and neutral)
		Single pole socket outlet 5 A - 250 V~ Conforms to BS 546: 1950 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm	NEW 1	7381 40	
10	7380 52	1 gang - switched - 5 A			




White

Durable solutions for everyday life

SPECIFICATIONS

- Robust thermoset construction
- Optional face plate screw concealment
- Uniform face plate thickness
- Conform to applicable International Standards
- Long-life silver contacts

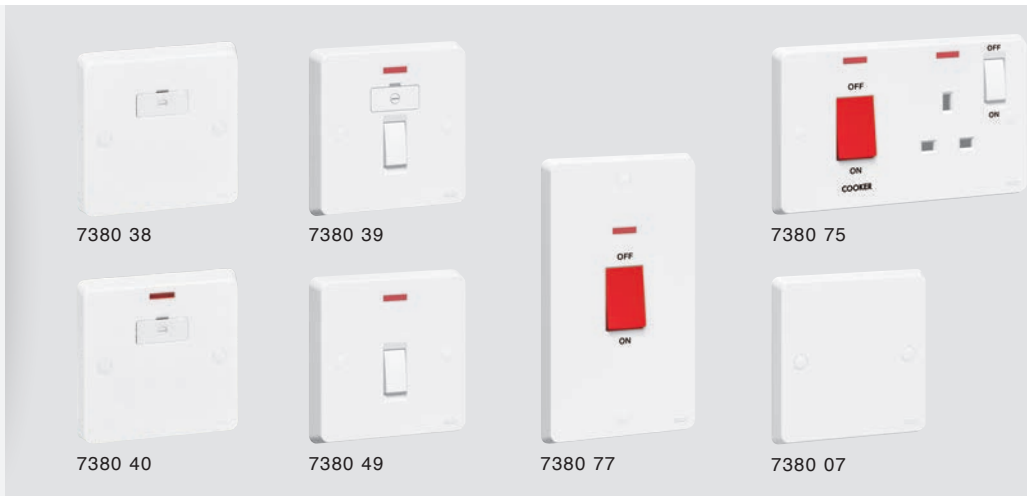

Pack Qty.	System Ref.	Product Name	Specifications	Pack Qty.	System Ref.	Product Name	Specifications
1	7380 41	Shaver socket IP 24	<p>Conforms to BS EN 61558-2-5: 1998 IP 24</p> <p>For use with European, British, American and Australian 2 pin plugs</p> <p>Screwless live and neutral terminals</p> <p>Double wound isolating transformer</p> <p>Automatic self-resetting overload feature</p> <p>Plug insertion operates microswitch which energises transformer</p> <p>Flush mounting back box: min. 47 mm deep</p> <p>Nominal plate dimensions: 146 x 86 mm</p>				
			240 V - 115 V ~ 50/60 Hz 20 VA				
			Fused connection units 13 A - 250 V ~				
			<p>Conforms to BS EN 1363 - Part 4: 1995</p> <p>Fused 13 A (fuse supplied)</p> <p>Locked captive fuse carrier (padlockable)</p> <p>Flush mounting back box: min. 25 mm deep</p> <p>Nominal plate dimensions: 86 x 86 mm</p>				
10	7380 38	NEW Unswitched + cord outlet					
10	7380 40	NEW Unswitched + cord outlet + power indicator					
10	7380 39	DP switched + cord outlet + power indicator					
			Double pole switches 20 A - 250 V ~				
			<p>Conform to BS EN 60669-1: 2000</p> <p>Flush mounting back box: min. 25 mm deep</p> <p>Nominal plate dimensions: 86 x 86 mm</p>				
10	7380 49	20 A DP + cord outlet + power indicator					
10	7380 47	20 A DP + cord outlet + power indicator marked 'WATER HEATER'					
1	7380 51	20 A DP I + cord outlet+power indicator+ marked "AIR CONDITIONER"					
			Cable outlet 20 A - 250 V ~				
			<p>Conforms to BS 5733: 1995</p> <p>Flush mounting back box: min. 25 mm deep</p> <p>Nominal plate dimensions: 86 x 86 mm</p>	10	7380 30	20 A terminal block	
			Cable outlet 45 A - 250 V ~				
			<p>Conforms to BS 5733: 1995</p> <p>Flush mounting back box: min. 35 mm deep</p> <p>Nominal plate dimensions: 86 x 86 mm</p>	1	7380 80	45 A terminal block	
			Double pole switches 45 A - 250 V ~				
			<p>Conform to BS EN 60669-1: 2000</p> <p>Flush mounting back box: min. 35 mm deep</p> <p>Nominal plate dimensions:</p> <p>1 gang - 86 x 86 mm</p> <p>2 gang - 146 x 86 mm</p>	5	7380 77	45 A DP + power indicator	
				10	7380 67	45 A DP + power indicator	
				1	7380 76	45 A DP + power indicator marked 'WATER HEATER'	
				1	7380 78	45 A DP + power indicator marked 'AIR CONDITIONER'	
			Cooker control unit				
			<p>Conforms to BS 4177: 1992</p> <p>45 A - 250 V ~ DP switch with 13 A - 250 V ~ DP switched socket outlet</p> <p>Flush mounting back box: min. 35 mm deep</p> <p>Nominal plate dimensions: 86 x 146 mm</p>	1	7380 75	45 A DP with 13 A DP switched socket + power indicator	



7380 71



7380 53



7380 97



7380 82






















7380 95



7380 96



7380 00

Pack Qty.	System Ref.		Pack Qty.	System Ref.	
		Data sockets			Blank plates
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm			Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
1	7380 95	 RJ 45 single	10	7380 07	 1 gang
1	7380 96	 RJ 45 double	10	7380 08	 2 gang
		TV and satellite sockets			Spare screw caps
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm			1 7380 09  Box of 500 spare screw caps
10	7380 71	 Screened TV - single			Surface mounting moulded boxes
1	7380 70	 Screened satellite - single			Dimensions: 1 gang - 87.2 x 87.2 mm 2 gang - 87.2 x 147.2 mm
1	7380 53	 Screened TV/satellite	10	7380 81	 1 gang - depth 16 mm
		Telephone sockets	10	7380 82	 1 gang - depth 35 mm
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm	10	7380 83	 1 gang - depth 47 mm
10	7380 00	 Single master UK	5	7380 84	 2 gang - depth 16 mm
10	7380 01	 Single secondary UK	5	7380 85	 2 gang - depth 35 mm
10	7380 99	 RJ 11/12 single	5	7380 86	 2 gang - depth 47 mm
		NEW Telephone + data socket	5	7380 87	 2 x 1 gang - depth 35 mm
1	7380 97	 BT master telephone + RJ 45 Cat. 6 UTP socket			



Contemporary style

Slim profile accessories
with contoured rockers



STYLISH
ACCESSORIES
FOR MODERN,
RELAXING
ENVIRONMENTS



/// Decorative accessories

Combining high quality components with proven reliability, Tenby's decorative accessories feature slim, elegant faceplates that are manufactured from corrosion resistant stainless steel to ensure that each of the three stylish finishes will look great for years to come. The new rockers are matching the colour of the faceplates.





Brushed stainless steel

Contemporary style

NEW

SPECIFICATIONS

- Brushed stainless steel plates with a clear epoxy finish
- Terminal screws captive and backed off ready for cabling



7484 11



7484 32
















7484 62



7484 10



7484 03

Pack Qty.	System Ref.		Pack Qty.	System Ref.	
		Plate switches 10 AX - 250 V\sim			Dimmer units - 230 V\sim
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 86 x 86 mm ; 4 and 6 gang - 86 x 146 mm			Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	7484 11	 1 gang - 1 way	1	7484 03	 1 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7484 12	 1 gang - 2 way	1	7484 04	 2 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7484 13	 1 gang - intermediate			Push on/off rotary universal dimmer 5 W/300 W
1	7484 22	 2 gang - 2 way			1 gang Conform to IEC 60669-2-1 For flush-mounting back box to be min. 40 mm deep. Nominal plate dimensions: 86 x 86 mm Equipped with overvoltage and short-circuit protection
1	7484 32	 3 gang - 2 way			 Screw terminals. For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W
1	7484 42	 4 gang - 2 way			- halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W
1	7484 62	 6 gang - 2 way			When switched on, gradually (2 seconds) lights up at level set before last switch-off
		Single pole press switch 10 A - 250 V\sim			
		Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 86 x 86 mm			
1	7484 10	 1 gang - 1 way push switch with bell symbol	1	7484 05	 NEW
		Rotary dimmer - 100/240 V\sim 50/60 Hz			
		Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm			
1	7484 06	 1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps 60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V			



7484 91



7484 52



7484 41



7484 82

Pack Qty.	System Ref.	Single pole socket outlets 13 A - 250 V \sim	NEW	Pack Qty.	System Ref.	Dual USB charging socket
		<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>				
1	7484 20	1 gang - switched		1	7484 52	<p>NEW</p> <p>For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V Comply with IEC 62684 5 V (output) - 2400 mA Wiring with 1.5 mm² and 2.5 mm² (only live and neutral)</p>
1	7484 21	1 gang - switched + power indicator				
1	7484 23	2 gang - switched				
1	7484 24	2 gang - switched + power indicator				
		<p>Double pole socket outlets 13 A - 250 V\sim</p> <p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>				
1	7484 81	1 gang - switched		1	7484 41	<p>Shaver socket</p> <p>Conforms to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 146 x 86 mm</p> <p> 240 V - 115 V\sim 50/60 Hz 20 VA</p>
1	7484 91	1 gang - switched + power indicator				
1	7484 82	2 gang - switched				
1	7484 92	2 gang - switched + power indicator				
		<p>Socket outlet 15 A - 250 V\sim</p> <p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>				
1	7484 55	1 gang - switched				



Brushed stainless steel

NEW

Contemporary style

SPECIFICATIONS

- Brushed stainless steel plates with a clear epoxy finish
- Terminal screws captive and backed off ready for cabling



7484 39










7484 67



7484 75



7484 30

Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Pack Qty.	System Ref.	Double pole switches 45 A - 250 V~
1	7484 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>DP switched + cord outlet + power indicator</p>	1	7484 77	<p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 146 x 86 mm</p>  <p>45 A DP + power indicator</p>
1	7484 44	<p>Double pole switch 20 A - 250 V~ Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A DP + power indicator</p>	1	7484 67	 <p>45 A DP + power indicator</p>
1	7484 30	<p>Cable outlet 20 A - 250 V~ Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A terminal block</p>	1	7484 75	<p>Cooker control unit Conforms to BS 4177: 1992 45 A - 250 V~ DP switch with 13 A - 250 V~ DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 146 mm</p>  <p>DP with DP switched socket + power indicator</p>
1	7484 31	<p>Cable outlet 45 A - 250 V~ Conforms to BS 5733: 1995 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>45 A terminal block</p>			



7484 71



7484 96










7484 07







7484 00



7484 73

Pack Qty.	System Ref.	
TV, radio and satellite sockets		
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	7484 71	 Screened TV - single
1	7484 70	 Screened satellite - single
1	7484 73	 Screened TV + FM + satellite
Telephone sockets		
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7484 00	 Single master UK
1	7484 01	 Single secondary UK
1	7484 99	 RJ 11/12 single
1	7484 98	 RJ 11/12 double

Pack Qty.	System Ref.	
Data sockets		
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7484 95	 RJ 45 single
1	7484 96	 RJ 45 double
Blank plates		
		Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
1	7484 07	 1 gang
1	7484 08	 2 gang



Polished stainless steel

Contemporary style

NEW

SPECIFICATIONS

- Stainless steel plates with a mirror finish
- Terminal screws captive and backed off ready for cabling



7486 11



7486 22















7486 42



7486 10



7486 03

Pack Qty.	System Ref.	Plate switches 10 AX - 250 V \sim	Pack Qty.	System Ref.	Dimmer units - 230 V \sim
1	7486 11	Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 86 x 86 mm 4 and 6 gang - 86 x 146 mm  1 gang - 1 way	1	7486 03	Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm  1 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7486 12	 1 gang - 2 way	1	7486 04	 2 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7486 13	 1 gang - intermediate			Push on/off rotary universal dimmer 5 W/300 W 1 gang Conform to IEC 60669-2-1 For flush-mounting back box to be min. 40 mm deep. Equipped with overvoltage and short-circuit protection Screw terminals. For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W When switched on, gradually (2 seconds) lights up at level set before last switch-off Nominal plate dimensions: 86 x 86 mm
1	7486 22	 2 gang - 2 way			
1	7486 32	 3 gang - 2 way			
1	7486 42	 4 gang - 2 way			
1	7486 62	 6 gang - 2 way			
1	7486 10	Single pole press switch 10 A - 250 V\sim Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 86 x 86 mm  1 gang - 1 way push switch with bell symbol	1	7486 05	NEW  1 gang - 2 way rotary dimmer
1	7486 06	Rotary dimmer - 100/240 V\sim 50/60 Hz Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm  1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps 60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V			



7486 81



7486 92














7486 55



7486 52



7486 41

Pack Qty.	System Ref.	NEW Single pole socket outlets 13 A - 250 V \sim	Pack Qty.	System Ref.	Socket outlet 15 A - 250 V \sim
1	7486 20	<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>  1 gang - switched	1	7486 55	<p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  1 gang - switched
1	7486 21	 1 gang - switched + power indicator	1	7486 52	<p>Dual USB charging socket For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V Comply with IEC 62684 5 V (output) - 2400 mA Wiring with 1.5 mm² and 2.5 mm² (only live and neutral)</p> 
1	7486 23	 2 gang - switched	1	7486 41	<p>Shaver socket Conforms to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 146 x 86 mm</p>  240 V - 115 V \sim 50/60 Hz 20 VA
1	7486 24	 2 gang - switched + power indicator			
1	7486 81	<p>Double pole socket outlets 13 A - 250 V\sim Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>  1 gang - switched			
1	7486 91	 1 gang - switched + power indicator			
1	7486 82	 2 gang - switched			
1	7486 92	 2 gang - switched + power indicator			



Polished stainless steel

Contemporary style

NEW

SPECIFICATIONS

- Stainless steel plates with a mirror finish
- Terminal screws captive and backed off ready for cabling



7486 39










7486 67



7486 77



7486 44

Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Pack Qty.	System Ref.	Double pole switches 45 A - 250 V~
1	7486 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>DP switched + cord outlet + power indicator</p>	1	7486 77	<p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 146 x 86 mm</p>  <p>45 A DP + power indicator</p>
1	7486 44	<p>Double pole switch 20 A - 250 V~</p> <p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A DP + power indicator</p>	1	7486 67	 <p>45 A DP + power indicator</p>
1	7486 30	<p>Cable outlet 20 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A terminal block</p>	1	7486 75	<p>Cooker control unit</p> <p>Conforms to BS 4177: 1992 45 A - 250 V~ DP switch with 13 A - 250 V~ DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 146 mm</p>  <p>DP with DP switched socket + power indicator</p>
1	7486 31	<p>Cable outlet 45 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>45 A terminal block</p>			



7486 71



7486 98










7486 08







7486 00



7486 73

Pack Qty.	System Ref.	
TV, radio and satellite sockets		
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	7486 71	 Screened TV - single
1	7486 70	 Screened satellite - single
1	7486 73	 Screened TV + FM + satellite
Telephone sockets		
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7486 00	 Single master UK
1	7486 01	 Single secondary UK
1	7486 99	 RJ 11/12 single
1	7486 98	 RJ 11/12 double

Pack Qty.	System Ref.	
Data sockets		
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7486 95	 RJ 45 single
1	7486 96	 RJ 45 double
Blank plates		
		Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
1	7486 07	 1 gang
1	7486 08	 2 gang



Satin brass

Contemporary style

NEW

SPECIFICATIONS

- Stainless steel plates with a satin brass finish
- Terminal screws captive and backed off ready for cabling



7482 11



7482 22















7482 62



7482 10



7482 03

Pack Qty.	System Ref.		Pack Qty.	System Ref.	
		Plate switches 10 AX - 250 V\sim			Dimmer units - 230 V\sim
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 86 x 86 mm 4 and 6 gang - 86 x 146 mm			Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	7482 11	 1 gang - 1 way	1	7482 03	 1 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7482 12	 1 gang - 2 way	1	7482 04	 2 gang - 2 way LV - 250 W push on/off rotary 50 Hz
1	7482 13	 1 gang - intermediate			Push on/off rotary universal dimmer 5 W/300 W
1	7482 22	 2 gang - 2 way			1 gang Conform to IEC 60669-2-1 For flush-mounting back box to be min. 40 mm deep. Nominal plate dimensions: 86 x 86 mm Equipped with overvoltage and short-circuit protection
1	7482 32	 3 gang - 2 way	1	7482 05	 Screw terminals. For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W When switched on, gradually (2 seconds) lights up at level set before last switch-off
1	7482 42	 4 gang - 2 way			
1	7482 62	 6 gang - 2 way			
		Single pole press switch 10 A - 250 V\sim			
		Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 86 x 86 mm			
1	7482 10	 1 gang - 1 way push switch with bell symbol			
		Rotary dimmer - 110/240 V\sim 50/60 Hz			
		Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm			
1	7482 06	 1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps 60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V			



7482 91



7482 92



7482 55



7482 52



7482 41

Pack Qty.	System Ref.	Single pole socket outlets 13 A - 250 V \sim	NEW	Pack Qty.	System Ref.	Dual USB charging socket
		<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>				<p>For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V Comply with IEC 62684 5 V (output) - 2400 mA Wiring with 1.5 mm² and 2.5 mm² (only live and neutral)</p>
1	7482 20	1 gang - switched		1	7482 52	NEW
1	7482 21	1 gang - switched + power indicator				<p>Shaver socket Conforms to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 146 x 86 mm</p>
1	7482 23	2 gang - switched				
1	7482 24	2 gang - switched + power indicator				
		<p>Double pole socket outlets 13 A - 250 V\sim</p> <p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm</p>				<p>1 7482 41 240 V - 115 V\sim 50/60 Hz 20 VA</p>
1	7482 81	1 gang - switched				
1	7482 91	1 gang - switched + power indicator				
1	7482 82	2 gang - switched				
1	7482 92	2 gang - switched + power indicator				
		<p>Socket outlet 15 A - 250 V\sim</p> <p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>				
1	7482 55	1 gang - switched				



Satin brass

Contemporary style

NEW

SPECIFICATIONS

- Stainless steel plates with a satin brass finish
- Terminal screws captive and backed off ready for cabling



7482 39




7482 44










7482 30



7482 67



7482 77

Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Pack Qty.	System Ref.	Double pole switches 45 A - 250 V~
1	7482 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>DP switched + cord outlet + power indicator</p>	1	7482 77	<p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 146 x 86 mm</p>  <p>45 A DP + power indicator</p>
1	7482 44	<p>Double pole switch 20 A - 250 V~</p> <p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A DP + power indicator</p>	1	7482 67	 <p>45 A DP + power indicator</p>
1	7482 30	<p>Cable outlet 20 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>20 A terminal block</p>	1	7482 75	<p>Cooker control unit</p> <p>Conforms to BS 4177: 1992 45 A - 250 V~ DP switch with 13 A - 250 V~ DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 146 mm</p>  <p>DP with DP switched socket + power indicator</p>
1	7482 31	<p>Cable outlet 45 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>45 A terminal block</p>			



7482 96



7482 07










7482 08







7482 73



7482 00

Pack Qty.	System Ref.	
		TV, radio and satellite sockets
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	7482 71	 Screened TV - single
1	7482 70	 Screened satellite - single
1	7482 73	 Screened TV + FM + satellite
		Telephone sockets
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7482 00	 Single master UK
1	7482 01	 Single secondary UK
1	7482 99	 RJ 11/12 single
1	7482 98	 RJ 11/12 double

Pack Qty.	System Ref.	
		Data sockets
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	7482 95	 RJ 45 single
1	7482 96	 RJ 45 double
		Blank plates
		Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
1	7482 07	 1 gang
1	7482 08	 2 gang



Classic elegance

For a touch
of sophistication



SLIM PROFILE
ROPE EDGE
ACCESSORIES
WITH HIDDEN
SCREWS



/// Classic rope edge accessories

For tasteful design with a traditional feel, Tenby's Classic rope edge accessories are the perfect answer. This timeless range uses slim profile, corrosion resistant faceplates with no visible screws and stylish contoured rockers to match each of the brass and gold finishes.





Classic brass

Classic elegance

SPECIFICATIONS

- Electroplated diecast plates with electrophoretically applied brass finish and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7388 12



7388 22




7388 62













7388 10



7388 03



7388 34

Pack Qty.	System Ref.		Pack Qty.	System Ref.	
		Plate switches 10 AX - 250 V\sim			Rotary dimmer - 110/240 V\sim 50/60 Hz
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 92 x 92 mm 4 and 6 gang - 92 x 152 mm			Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm
1	7388 12	 1 gang - 2 way	1	7388 06	 1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps
1	7388 13	 1 gang - intermediate			60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V
1	7388 22	 2 gang - 2 way			Dimmer units - 230 V\sim
1	7388 32	 3 gang - 2 way			Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer
1	7388 42	 4 gang - 2 way			Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7388 62	 6 gang - 2 way			 1 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Single pole press switch 10 A - 250 V\sim			 2 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 92 x 92 mm			
1	7388 10	 1 gang - 1 way push switch	1	7388 03	
			1	7388 04	



7388 81



7388 55



7388 92



7388 41

Pack Qty.	System Ref.	Double pole socket outlets 13 A - 250 V \sim	Pack Qty.	System Ref.	International socket outlets - Max 250 V \sim
1	7388 81	<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm</p> <p>1 gang - switched</p>	1	7388 16	<p>Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p> <p>1 gang - 10/16 A Euro-US</p>
1	7388 91	<p>1 gang - switched + power indicator</p>	1	7388 64	<p>2 gang - 10/16 A Euro-US</p>
1	7388 82	<p>2 gang - switched</p>			<p>Shaver socket</p> <p>Conforms to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 152 x 92 mm</p>
1	7388 92	<p>2 gang - switched + power indicator</p>	1	7388 41	<p>240 V - 115 V\sim 50/60 Hz 20 VA</p>
1	7388 55	<p>Socket outlet 15 A - 250 V\sim</p> <p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p> <p>1 gang - switched</p>			



Classic brass

Classic elegance

SPECIFICATIONS

- Electroplated diecast plates with electrophoretically applied brass finish and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7388 39













7388 67



7388 21



7388 44

Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Pack Qty.	System Ref.	Double pole switches 45 A - 250 V~
1	7388 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>DP switched + cord outlet + power indicator</p>	1	7388 21	<p>Conform to BS EN 60669-1: 2000 Red rocker Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 152 x 92 mm</p>  <p>45 A DP + power indicator</p>
1	7388 44	<p>Double pole switches 20 A - 250 V~</p> <p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A DP + power indicator</p>	1	7388 67	 <p>45 A DP + power indicator</p>
1	7388 94	 <p>20 A DP + cord outlet + power indicator</p>	1	7388 76	 <p>45 A DP + power indicator marked 'WATER HEATER'</p>
1	7388 30	<p>Cable outlet 20 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A terminal block</p>	1	7388 78	 <p>45 A DP + power indicator marked 'AIR CONDITIONER'</p>
1	7388 31	<p>Cable outlet 45 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>45 A terminal block</p>	1	7388 75	<p>Cooker control unit</p> <p>Conforms to BS 4177: 1992 Red rocker 45 A - 250 V~ DP switch with 13 A - 250 V~ DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 152 mm</p>  <p>DP with DP switched socket + power indicator</p>



7388 71



7388 73



7388 00










7388 96







7388 07



7388 08

Pack Qty.	System Ref.	
TV, radio and satellite sockets		
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7388 71	 Screened TV - single
1	7388 70	 Screened satellite - single
1	7388 73	 Screened TV + FM + satellite
Telephone sockets		
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7388 00	 Single master UK
1	7388 01	 Single secondary UK
1	7388 97	 RJ 11/12 single
1	7388 98	 RJ 11/12 double

Pack Qty.	System Ref.	
Data sockets		
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7388 95	 RJ 45 single
1	7388 96	 RJ 45 double
Blank plates		
		Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm
1	7388 07	 1 gang
1	7388 08	 2 gang



Classic gold

Classic elegance

SPECIFICATIONS

- Electroplated diecast plates with electrophoretically applied brass finish with matt gold detail and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7379 12



7379 22



7379 42












7379 10



7379 03



7379 34

Pack Qty.	System Ref.		Pack Qty.	System Ref.	
		Plate switches 10 AX - 250 V\sim			Rotary dimmer - 110/240 V\sim 50/60 Hz
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 92 x 92 mm 4 and 6 gang - 92 x 152 mm			Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm
1	7379 12	 1 gang - 2 way			1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps
1	7379 13	 1 gang - intermediate	1	7379 35	60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V
1	7379 22	 2 gang - 2 way			Dimmer units - 230 V\sim
1	7379 32	 3 gang - 2 way			Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Tungsten filament, halogen lamps and suitable GU10 low voltage systems using appropriate transformer
1	7379 42	 4 gang - 2 way			Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7379 62	 6 gang - 2 way			1 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Single pole press switch 10 A - 250 V\sim			2 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 92 x 92 mm	1	7379 03	
1	7379 10	 1 gang - 1 way push switch	1	7379 04	



7379 91











7379 64



7379 92



7379 41

Pack Qty.	System Ref.	Double pole socket outlets 13 A - 250 V \sim	Pack Qty.	System Ref.	International socket outlets - Max 250 V \sim
1	7379 81	<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm</p>  <p>1 gang - switched</p>	1	7379 16	<p>Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>1 gang - 10/16 A Euro-US</p>
1	7379 91	 <p>1 gang - switched + power indicator</p>	1	7379 64	 <p>2 gang - 10/16 A Euro-US</p>
1	7379 82	 <p>2 gang - switched</p>			<p>Shaver socket</p> <p>Conforms to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 152 x 92 mm</p>
1	7379 92	 <p>2 gang - switched + power indicator</p>	1	7379 41	 <p>240 V - 115 V\sim 50/60 Hz 20 VA</p>
1	7379 55	<p>Socket outlet 15 A - 250 V\sim</p> <p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>1 gang - switched</p>			



Classic gold

Classic elegance

SPECIFICATIONS

- Electroplated diecast plates with electrophoretically applied brass finish with matt gold detail and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7379 39



7379 44













7379 75



7379 30



7379 67

Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Pack Qty.	System Ref.	Double pole switches 45 A - 250 V~
1	7379 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>DP switched + cord outlet + power indicator</p>	1	7379 21	 <p>45 A DP + power indicator</p>
1	7379 44	<p>Double pole switches 20 A - 250 V~</p> <p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A DP + power indicator</p>	1	7379 67	 <p>45 A DP + power indicator</p>
1	7379 94	 <p>20 A DP + cord outlet + power indicator</p>	1	7379 76	 <p>45 A DP + power indicator marked "WATER HEATER"</p>
1	7379 30	<p>Cable outlet 20 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A terminal block</p>	1	7379 78	 <p>45 A DP + power indicator marked "AIR CONDITIONER"</p>
1	7379 31	<p>Cable outlet 45 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm</p>  <p>45 A terminal block</p>	1	7379 75	<p>Cooker control unit</p> <p>Conforms to BS 4177: 1992 Red rocker 45 A - 250 V~ DP switch with 13 A - 250 V~ DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 152 mm</p>  <p>DP with DP switched socket + power indicator</p>



7379 71



7379 07










7379 08







7379 96



7379 97

Pack Qty.	System Ref.	TV, radio and satellite sockets
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7379 71	 Screened TV - single
1	7379 70	 Screened satellite - single
1	7379 73	 Screened TV + FM + satellite
		Telephone sockets Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7379 00	 Single master UK
1	7379 01	 Single secondary UK
1	7379 97	 RJ 11/12 single
1	7379 98	 RJ 11/12 double

Pack Qty.	System Ref.	Data sockets
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7379 95	 RJ 45 single
1	7379 96	 RJ 45 double
		Blank plates Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm
1	7379 07	 1 gang
1	7379 08	 2 gang



Alhambra

Arabic design,
British engineering



A UNIQUE
STYLE
FOR ANY
ENVIRONMENT



/// Unique inspiration and expertise

Inspired by the original decorations of the Alhambra Palace in Granada, Spain, Tenby have produced a range of wiring accessories that gives a unique style to any environment. Added to the classic design is the very latest in engineering. Made in England by Tenby, only the finest materials are used, including silver switch contacts, to ensure a long and reliable life. The range fully complies with the relevant British standards and is subject to the most stringent quality control.





Alhambra


Arabic design, British engineering

SPECIFICATIONS


- Electroplated diecast plates with electrophoretically applied decorative finish and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7393 12



7393 22










7393 04



7393 03



7393 62

Pack Qty.	System Ref.			Pack Qty.	System Ref.	
		Plate switches 10 AX - 250 V\sim				Rotary dimmer - 110/240 V\sim 50/60 Hz
		Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 1, 2 and 3 gang - 92 x 92 mm 4 and 6 gang - 92 x 152 mm				Conform to BS EN 60669-2-1 Rotary dimming and push on/off Flush mounting box: mini 35 mm depth Nominal plate dimension 86 x 86 mm
1	7393 12		1 gang - 2 way			1 gang - 2 way 60 - 1000 W / 230 V or 60 - 500 W / 127 V for halogen and incandescent lamps
1	7393 13		1 gang - intermediate	1	7393 35	60 - 1000 VA / 230 V or 60 - 500 VA / 127 V for halogen lamps with ferromagnetic transformers Can control electronic transformers with leading edge behaviour, max: 600 VA / 230 V or 300 VA / 127 V
1	7393 22		2 gang - 2 way			Dimmer units - 230 V\sim
1	7393 32		3 gang - 2 way			Conform to BS EN 60669-2-1: 2000 and BS EN 55015 For use with 230 V AC Dimmers for use with tungsten filament lamps, mains voltage GU10 halogen lamps and low voltage systems using appropriate transformers
1	7393 42		4 gang - 2 way			Rotary dimming and push on/off Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7393 62		6 gang - 2 way	1	7393 03	1 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Single pole press switch 10 A - 250 V\sim		1	7393 04	2 gang - 2 way 40 W/VA - 250 W push on/off rotary - 50 Hz
		Conforms to BS EN 60669-1: 2000 Flush mounting back box: min. 16 mm deep Nominal plate dimensions: 92 x 92 mm				
1	7393 10		1 gang - 1 way push switch			



7393 55











7393 81



7393 92



7393 41

Pack Qty.	System Ref.	Double pole socket outlets 13 A - 250 V \sim	Pack Qty.	System Ref.	International socket outlets - Max 250 V \sim
		<p>Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutter mechanism 2 earth terminals Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm</p>			<p>Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>
1	7393 81	 1 gang - switched	1	7393 16	 1 gang - 10/16 A Euro-US
1	7393 91	 1 gang - switched + power indicator	1	7393 64	 2 gang - 10/16 A Euro-US
1	7393 82	 2 gang - switched			<p>Shaver socket</p> <p>Conform to BS EN 61558-2-5: 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box: min. 47 mm deep Nominal plate dimensions: 152 x 92 mm</p>
1	7393 92	 2 gang - switched + power indicator			
		<p>Socket outlet 15 A - 250 V\sim</p> <p>Conforms to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>			
1	7393 55	 1 gang - unswitched	1	7393 41	 Supply: 230 V 50/60 Hz Output: 230/120 V - 20 VA max



Alhambra

Arabic design, British engineering

SPECIFICATIONS


- Electroplated diecast plates with electrophoretically applied decorative finish and matching rockers
- No visible fixing screws
- Terminal screws captive and backed off ready for cabling



7393 39













7393 67



7393 21



7393 44


Pack Qty.	System Ref.	Fused connection unit 13 A - 250 V~	Double pole switches 45 A - 250 V~
1	7393 39	<p>Conforms to BS EN 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Locked captive fuse carrier (padlockable) Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>DP switched + cord outlet + power indicator</p>	<p>Conform to BS EN 60669-1: 2000 Red rocker Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 152 x 92 mm</p>
1	7393 44	<p>Double pole switches 20 A - 250 V~</p> <p>Conform to BS EN 60669-1: 2000 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A DP + power indicator</p>	<p>1 7393 21  45 A DP + power indicator</p>
1	7393 46	 <p>20 A DP + power indicator marked 'WATER HEATER'</p>	<p>1 7393 67  45 A DP + power indicator</p>
1	7393 94	 <p>20 A DP + cord outlet + power indicator</p>	<p>1 7393 78  45 A DP + power indicator marked 'AIR CONDITIONER'</p>
1	7393 30	<p>Cable outlet 20 A - 250 V~</p> <p>Conforms to BS 5733: 1995 Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm</p>  <p>20 A terminal block</p>	<p>1 7393 76  45 A DP + power indicator marked 'WATER HEATER'</p>
1	7393 75		<p>Cooker control unit</p> <p>Conforms to BS 4177: 1992 Red rocker 45 A - 250 V DP switch with 13 A - 250 V DP switched socket outlet Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 152 mm</p>  <p>DP with DP switched socket + power indicator</p>



7393 00










7393 96







7393 73



7393 71

Pack Qty.	System Ref.	TV, radio and satellite sockets
		Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 92 x 92 mm
1	7393 71	 Screened TV - single
1	7393 70	 Screened satellite - single
1	7393 73	 Screened TV + FM + satellite
		Telephone sockets
		Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7393 00	 Single master UK
1	7393 01	 Single secondary UK
1	7393 97	 RJ 11/12 single
1	7393 98	 RJ 11/12 double

Pack Qty.	System Ref.	Data sockets
		CAT 6 Rapid cable connection Flush mounting back box: min. 35 mm deep Nominal plate dimensions: 92 x 92 mm
1	7393 95	 RJ 45 single
1	7393 96	 RJ 45 double
		Blank plates
		Nominal plate dimensions: 1 gang - 92 x 92 mm 2 gang - 92 x 152 mm
1	7393 07	 1 gang
1	7393 08	 2 gang




Accessories and Metal Clad



Plug-in ceiling rose



KNOWN
FOR ITS
DURABILITY
AND
RELIABILITY

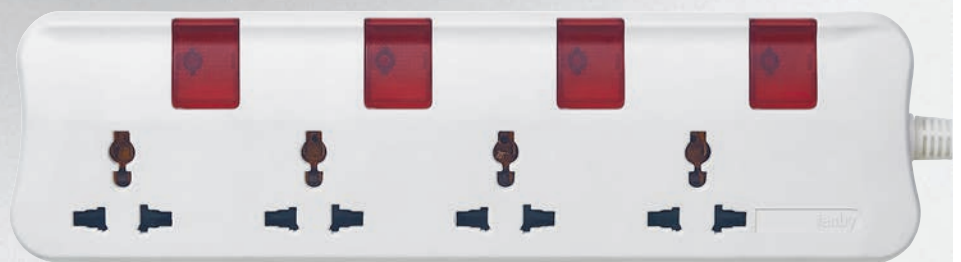



7394 01



7394 91



7394 90



7372 12



7372 77



7394 14



7372 32

NEW

Pack Qty.	System Ref.	Multi-standard multi-outlet extensions with cord
		<p>13 A max. Power: 3250 W at 250 V - 50/60 Hz Can receive different type of standard plugs: US, British, EU... Sockets equipped with: - shutters for child protection - on/off single pole safety switch, with light indicator Can be wall, desk or floor-mounted thanks to key holes at the back Flame-retardant material (up to 850°C) Overload protection by fuse (integrated into the plug) Power supply 1.25 mm² section</p>
1	7394 04	4 x 2P+E with 3 m cord
10	7394 15	5 x 2P+E with 3 m cord
1	7394 05	4 x 2P+E with 5 m cord
1	7394 65	5 x 2P+E with 5 m cord
1	7394 74	4X2p+E 4 Switches + 2 Usb 3M White
1	7394 75	4X2p+E 4 Switches + 2 Usb 5M White
1	7394 76	4X2p+E 4 Switches + 2 Usb 3M Black Plug
		<p>Ceiling roses 3-pin ceiling roses - 250 V - 6 A Can be mounted on a BESA box Strong load grips support: up to 5 kg</p>
10	7394 90	With screw connection terminals : 5 x 0.75 mm ² , 5 x 1 mm ² , 4 x 1.5 mm ² , 3 x 2.5 mm ² , 2 x 4 mm ²
20	7394 91	With plug-in connection Mechanical and electrical connection in one click-in action Connection terminals: - base: 4 x 1.5 mm ² - plug: 3 x 1.5 mm ²

Pack Qty.	System Ref.	British standard plug
		<p>With integrated fuse for protection against overloads ○ White</p>
20	7394 01	13 A - 250 V ~ - 2P+⊕
		<p>Plate switches 10 AX - 250V</p>
1	7372 12	1 gang - 2 way 10 AX Switch
1	7372 22	2 gang - 2 way 10 AX Switch
1	7372 32	3 gang - 2 way 10 AX Switch
		<p>Single pole socket outlet</p>
1	7372 55	Socket outlet 15A switch
		<p>Double pole switches</p>
1	7372 44	20A Control switch DP 1 gang - 1 way power indicator
1	7372 58	Socket outlet 13A switch 1G DP Single Earth
1	7372 59	Socket outlet 13A switch 1G DP + Power Indicator
1	7372 68	Socket outlet 13A switch 2G DP Single Earth
1	7372 77	45A DP Switch 146x 86 Neon
		<p>Metal Blank Plates Nominal plate dimensions: 1 gang - 86 x 86 mm 2 gang - 86 x 146mm</p>
1	7372 07	Ancillary Fitting Blank Plate - 1 gang
1	7372 08	Ancillary Fitting Blank Plate - 2 gang



Catalogue number index

System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page
7372 07			91	1	33	62	5	8	22	1	28
737207	1	43	92	1	-	63	5	9	30	1	30
08	1	-	94	1	34	64	5	9	31	1	-
12	1	-	95	1	35	65	5	-	32	1	28
22	1	-	96	1	-	67	10	10	39	1	30
32	1	-	97	1	35	70	1	11	41	1	29
44	1	-	98	1	35	71	10	-	42	1	28
55	1	-	7380 00			75	1	10	44	1	30
58	1	-	7380 00	10	11	76	1	-	55	1	-
59	1	-	01	10	-	77	5	-	62	1	28
68	1	-	03	1	8	78	1	-	64	1	-
77	1	-	04	1	-	80	1	-	67	1	30
7379 00			05	1	-	81	10	11	70	1	31
7379 00	1	35	06	1	-	82	10	-	71	1	-
01	1	-	07	10	11	83	10	-	73	1	-
03	1	32	08	10	-	84	5	-	75	1	30
04	1	-	09	1	-	85	5	-	76	1	-
07	1	35	10	5	8	86	5	-	78	1	-
08	1	-	11	10	-	87	5	-	81	1	29
10	1	32	12	10	-	95	1	-	82	1	-
12	1	-	13	10	-	96	1	-	91	1	29
13	1	-	14	5	-	97	1	-	92	1	-
16	1	33	16	5	9	99	10	-	94	1	30
21	1	34	18	10	-	7381 00			95	1	31
22	1	32	19	10	-	738110	1	8	96	1	-
30	1	34	20	10	-	40	1	9	97	1	-
31	1	-	21	10	8	41	1	-	98	1	-
32	1	32	22	10	-	42	1	-	7393 00		
35	1	-	28	5	9	43	1	-	7393 00	1	41
39	1	34	29	5	-	44	1	-	01	1	41
41	1	33	30	10	10	81	1	-	03	1	38
42	1	32	31	10	8	82	1	-	04	1	38
44	1	34	32	10	-	7388 00			07	1	41
55	1	33	38	10	10	7388 00	1	31	08	1	41
62	1	32	39	10	-	01	1	-	10	1	38
64	1	-	40	10	-	03	1	28	12	1	38
67	1	34	41	1	-	04	1	-	13	1	38
70	1	35	42	5	8	06	1	-	16	1	39
71	1	-	47	10	10	07	1	31	21	1	40
73	1	33	49	10	-	08	1	-	22	1	38
75	1	34	50	10	9	10	1	28	30	1	40
76	1	-	51	10	10	12	1	-	32	1	38
78	1	-	52	10	9	13	1	-	35	1	-
81	1	33	53	1	11	16	1	29	39	1	40
82	1	-	55	10	-	21	1	30	41	1	39

System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page	System Ref.	Pack Qty.	Page
42	1	38	10	1	22	10	1	14	10	1	18
44	1	-	11	1	-	11	1	-	11	1	-
46	1	40	12	1	-	12	1	-	12	1	-
55	1	-	13	1	-	13	1	-	13	1	-
62	1	38	20	1	23	20	1	15	20	1	19
64	1	-	21	1	-	21	1	-	21	1	-
67	1	40	22	1	22	22	1	14	22	1	18
70	1	41	23	1	23	23	1	15	23	1	19
71	1	-	24	1	-	24	1	-	24	1	-
73	1	-	30	1	24	30	1	16	30	1	20
75	1	40	31	1	-	31	1	-	31	1	-
76	1	-	32	1	22	32	1	14	32	1	18
78	1	40	39	1	24	39	1	16	39	1	20
81	1	39	41	1	23	41	1	15	41	1	19
82	1	-	42	1	22	42	1	14	42	1	18
91	1	39	44	1	24	44	1	16	44	1	20
92	1	-	52	1	23	52	1	15	52	1	19
94	1	40	55	1	-	55	1	-	55	1	-
95	1	41	62	1	22	62	1	14	62	1	18
96	1	-	67	1	24	67	1	16	67	1	20
97	1	-	70	1	25	70	1	17	70	1	21
98	1	-	71	1	-	71	1	-	71	1	-
7394 00			73	1	-	73	1	-	73	1	-
01	20	43	75	1	24	75	1	16	75	1	20
04	1	43	77	1	-	77	1	-	77	1	-
05	1	43	81	1	23	81	1	15	81	1	-
15	1	-	82	1	-	82	1	-	82	1	-
65	1	43	91	1	23	91	1	-	91	1	-
74	1	43	92	1	-	92	1	-	92	1	-
75	1	43	95	1	25	95	1	17	95	1	21
76	1	43	96	1	-	96	1	-	96	1	-
90	10	-	98	1	-	98	1	-	98	1	-
91	20	-	99	1	-	99	1	-	99	1	-
7482 00			7484 00			7486 00					
7482 00	1	25	7484 00	1	17	7486 00	1	21			
01	1	-	01	1	-	01	1	-			
03	1	22	03	1	14	03	1	18			
04	1	-	04	1	-	04	1	-			
05	1	-	05	1	-	05	1	-			
06	1	-	06	1	-	06	1	-			
07	1	25	07	1	17	07	1	21			
08	1	-	08	1	-	08	1	-			

Iraq

Tel: (+974) 5081 9289

Kuwait

Shuwaikh Safat 13002

P.O. Box 177

KUWAIT

Tel: (+965) 9726 2699

Fax: (+965) 2482 4754

Lebanon

Achrafieh 5585 Bldg., 6th Floor

P. Gemayel Avenue - Aadlieh

Beirut

Tel: (+961) 1 422 166

Fax: (+961) 1 422 167

Oman

Tel: (+968) 9139 7978

Sales Office For Gulf Countries CDME Middle East

P.O. Box 28598

2080 Nicosia—Cyprus

Tel. +357 226 72577

Fax +357 226 78065

Pakistan

Tel: (+92) 332 374 9443

Saudi Arabia

Riyadh (Central Region Office)

Al-Sulaiman Square Building 2nd Floor,
Office 16

Mousa Bin Nusair Street

P.O. Box 325099

Tel: (+966) 11 466 66 40

Fax: (+966) 11 279 01 17

Al Khobar (Eastern Region Office)

Al-Khobar Mall

2nd Floor, Office 362

P.O. Box 927

Al Khobar 31952

Tel: (+966) 3 887 89 50

Fax: (+966) 3 887 89 52

Jeddah (Western Region Office-Head Office)

Al-Reem Business Center

2nd Floor

Al-Rawdah District

P.O. Box 51712

Jeddah 21553

Tel: (+966) 2 261 9696

Fax: (+966) 2 261 9797

United Arab Emirates

Wing C, Office 701

Dubai Silicon Oasis

P.O. Box 341068

Dubai

Tel: (+971) 4 3821 821

Fax: (+971) 4 3821 822

GemNet Gulf L.L.C.

(A group company of Legrand)


Street No. 26, Al Quoz Industrial Area 4,

P.O. Box 52914,


Dubai, United Arab Emirates


Tel: (+971) 4 341 9920


Fax: (+971) 4 341 9940

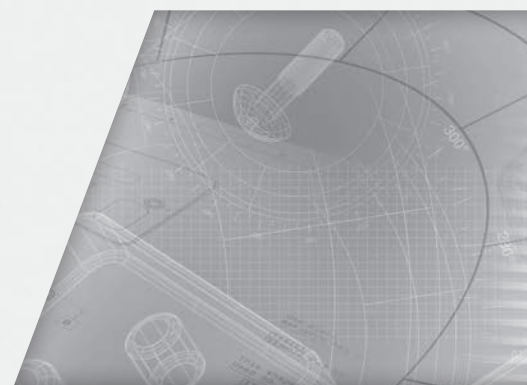



FOLLOW US ON

 www.legrand.ae

 [legrandgulfcountries](#)

 [legrandgulfcountries](#)

 [legrandgulfcountries](#)

 [legrandgulfcountries](#)

MIDDLE EAST HEADQUARTERS

Dubai Silicon Oasis, Wing C
Office 701

P.O. Box: 341068

Dubai - U.A.E.

Tel: (+971) 4 3821 821

Fax: (+971) 4 3821 822
