

# MULTI OUTLETS EXTENSION CORD



SAFETY **FIRST**

# SAFETY FIRST

BRITISH STANDARD  
250 V - 3250 W  
50-60 HZ

Lighted 2 pole safety switch

Compact size,  
only 30 mm thick

Safety shutter




## RESISTANT


- Flame retardant 850°C.  
Guaranteed isolation to prevent fires and electrical shocks
- Overload protection by fuse
- International Safety Standard

## PRATICAL


- For wall, desk and floor mounting with screw

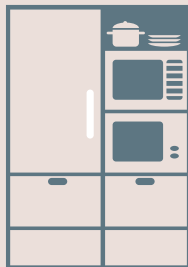

■ AT HOME



Cable 3 or 5 meters long

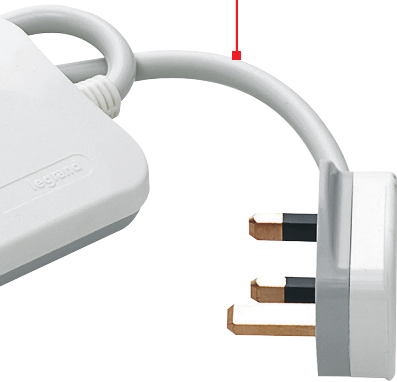

## CHOICES

- Extension cord 4, 5 or 6 outlets
- Cable 3 or 5 meters long



Certified  
by ASTA

Design  
and  
Quality  
by Legrand

### ■ IN THE OFFICE



# A COMPLETE RANGE

x4 | x5 | x6



Ref	Designation	Quantity
698424	EXTENSION CORD 4 X 2P+E + 1 DP SWITCH ILLUMINATED + 3M CABLE LENGTH STANDARD BS	
698425	EXTENSION CORD 5 X 2P+E + 1 DP SWITCH ILLUMINATED + 3M CABLE LENGTH STANDARD BS	
698426	EXTENSION CORD 6 X 2P+E + 1 DP SWITCH ILLUMINATED + 3M CABLE LENGTH STANDARD BS	
698434	EXTENSION CORD 4 X 2P+E + 1 DP SWITCH ILLUMINATED + 5M CABLE LENGTH STANDARD BS	
698435	EXTENSION CORD 5 X 2P+E + 1 DP SWITCH ILLUMINATED + 5M CABLE LENGTH STANDARD BS	
698436	EXTENSION CORD 6 X 2P+E + 1 DP SWITCH ILLUMINATED + 5M CABLE LENGTH STANDARD BS	

LEGRAND PRO AND CONSUMER SERVICE  
BP 30076  
87002 Limoges Cedex  
France  
[www.legrand.com](http://www.legrand.com)

 **legrand**<sup>®</sup>

EXB16022